

DECCA Pendant
3-24-xxxx

oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____



-1540 Black Oak/Aged Brass




-5224 White Oak/Satin Nickel



-2440 Walnut/Aged Brass

LIGHT SOURCE	LED Array, 3000K, CRI 90
LUMINAIRE POWER	20.8W at 120V
RATED LIFE	50000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: 346 lm (LM-79)
INPUT VOLTAGE	120V AC, 60Hz
DRIVER OUTPUT	24Vdc Constant Voltage, 1000mA max current
DIMMING	TRIAC Dimming (Forward Phase, Magnetic Low Voltage)
CONSTRUCTION	Cold Rolled Steel Canopy, Wood Housing
DIFFUSER	- Matte White Acrylic
FINISHES	Black Oak/Aged Brass (-1540), Walnut/Aged Brass (-2440), White Oak/Satin Nickel (-5224)
MOUNTING	4" Octagonal J-Box
STANDARDS	ETL Dry listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

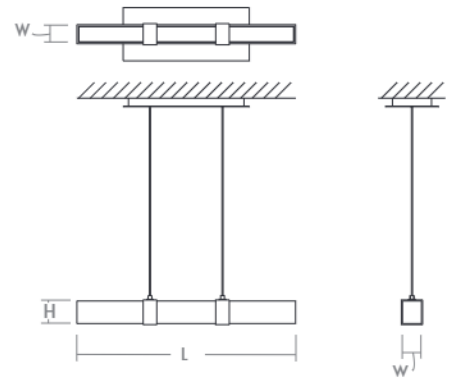

DIMENSIONS

Canopy: 14.00" L x 6.00" W x 1.00" H
 Fixture: 24.25" L x 2.125" W x 2.75" H
 *Hanging height adjustable
 with 10ft. cables

Order example for standard fixture:
3-24-1540 (x- Voltage - xxx-Sequence # - xx-Finish)
 3: 120V Only

