

DIETER Pendant
3-22-xx

oxygen

FIXTURE TYPE _____

LOCATION _____


PROJECT _____

DATE _____



-15 Black (Lit)

LIGHT SOURCE	(6x) 8.5W LED Arrays, 3000K, CRI 90
LUMINAIRE POWER	48.0W Input Power
RATED LIFE	30000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: 2826 lm (LM-79)
INPUT VOLTAGE	120V AC, 50/60Hz
DRIVER OUTPUT	1200mA, 43.2W max power
DIMMING	TRIAC Dimming
CONSTRUCTION	Cold Rolled Steel Housing and Canopy
DIFFUSER	- Matte White Acrylic
FINISHES	White (-6), Black (-15)
MOUNTING	4" Octagonal J-Box
STANDARDS	cETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

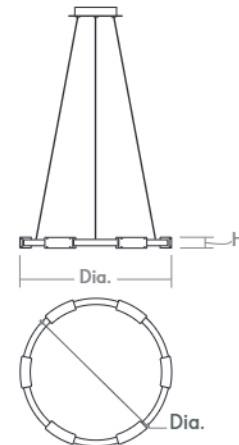

DIMENSIONS

Dia. Fixture: 24.25"
H. Fixture: 1.75"
Supplied with 10' adjustable cable to customize hanging height

Order example for standard fixture:
3-22-6 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V Only

