

DUNE Pendant
3-641-xxxx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-1624 Gray/Satin Nickel Lit



-1540 Dark Gray/Aged Brass

- LIGHT SOURCE (Not Included)** Medium Base Socket
 1x 24W max PAR20/30/38, A19, A21
Lamp Not Included
- LUMINAIRE POWER** Fixture certified for use with 24W medium base LED lamp
- INPUT VOLTAGE** 120V AC, 50/60Hz
- CONSTRUCTION** Concrete and Steel
- DIFFUSER** - Concrete
- FINISHES** Dark Gray/Aged Brass (-1540),
 Gray/Satin Nickel (-1624)
- MOUNTING** 4" Octagonal J-Box
 *Junction box must be securely mounted to building structure
 and capable of supporting at least 25 pounds.
- STANDARDS** cUL Damp Listed, Conforms to UL STD 1598,
 Certified CAN/CSA STD C22.2 No 250.0.

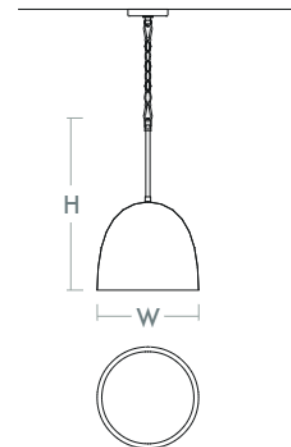

DIMENSIONS

- W. Fixture:** 12.25"
H. Fixture: 21.00"
 * Measured using 1-8" stem for
 minimum hanging height
Weight: 16 lbs.
 Supplied with 2-8", 2-12", and 2-16"
 stems plus 1' of chain

Order example for standard fixture:
3-641-1540 (x- Voltage - xxx-Sequence # - xx-Finish)
 3: 120V Only

