

**DUO Wall Sconce**  
**3-509-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



-40 Aged Brass



-18 Gunmetal




-24 Satin Nickel



With optional backplate

LIGHT SOURCE	2 x 7W Max LED GU10 Base Socket (Lamp not included)
LUMINAIRE POWER	14.4W at 120V
RATED LIFE	See LED bulb manufacturer specification
LUMEN OUTPUT	Delivered: 761 lm (LM-79)**
INPUT VOLTAGE	120V
DRIVER OUTPUT	N/A
CONSTRUCTION	Plated Steel and Glass
DIFFUSER	- Frosted Glass
FINISHES	Gunmetal (-18), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	2" x 3" J-Box, 4" Octagonal J-Box*, 4" Square J-Box with a single device mud ring *Backplate required to cover J-Box
STANDARDS	UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.  **Lumen Output may vary based on the lamp that is used

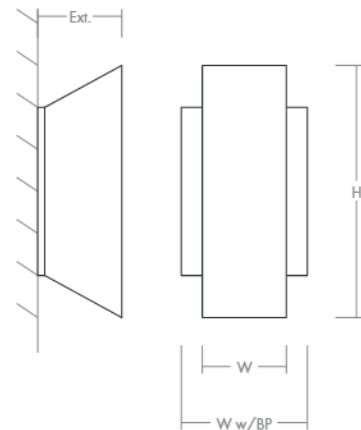

**DIMENSIONS**

W:	3.00"
H:	9.25"
Ext:	3.00"
M.C:	4.58" From top of fixture

**With backplate**

W:	4.75"
H:	9.25"
Ext:	3.12"
M.C:	4.58" From top of fixture

Order example for standard fixture:  
**3-509-24** (x- Voltage - xxx-Sequence # - xx-Finish)  
3: 120V

