

**ELIF Outdoor**  
**3-736-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_




-16 Gray



-22 Oiled Bronze

LIGHT SOURCE	1 x 12.1W LED, 3000K, CRI 90
LUMINAIRE POWER	14.4W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 426 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	350mA, 14.7W max power
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Cast Aluminum and Polycarbonate
DIFFUSER	- White Polycarbonate
FINISHES	Gray (-16), Oiled Bronze (-22)
MOUNTING	4" Octagonal J-Box*, 4" Square J-Box* with a single device mud ring** *Deep J-Box (Required to house driver) **Mud ring must be mounted horizontally (Installer must provide a bead of caulk between fixture housing and mounting surface)
STANDARDS	UL Wet listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

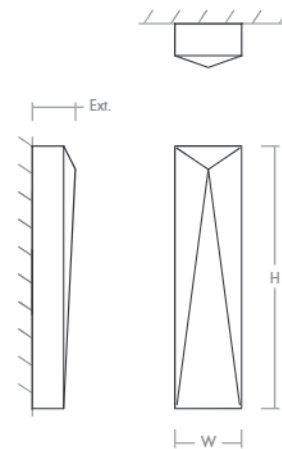

**DIMENSIONS**

W:	4.25"
H:	16.50"
Ext:	2.75"
M.C:	8.55" From top of fixture

Order example for standard fixture:  
**3-736-22** (x- Voltage - xxx-Sequence # - xx-Finish)  
 3: 120V to 277V  
 Order example for optional color temperatures: **3-736-2722**  
 27: 2700K, 35: 3500K, 40: 4000K

