

EPOCH Wall Sconce
3-564-xxx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-40 Aged Brass



-22 Oiled Bronze



-24 Satin Nickel

Diffusers:




-1 White Cotton



-2 Matte White Acrylic

LIGHT SOURCE	1 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	12.4W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: (-1) Fabric: 766 lm (LM-79) (-2) Acrylic: TBD lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	350mA, 14.7W max power
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Plated Steel and Acrylic /or Fabric
DIFFUSER/ METAL FINISHES	(-122) White Cotton / Oiled Bronze (-124) White Cotton / Satin Nickel (-140) White Cotton / Aged Brass (-222) Matte White Acrylic / Oiled Bronze (-224) Matte White Acrylic / Satin Nickel (-240) Matte White Acrylic / Aged Brass
MOUNTING	4" Octagonal J-Box* *Deep J-Box (Required to house driver)
STANDARDS	UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

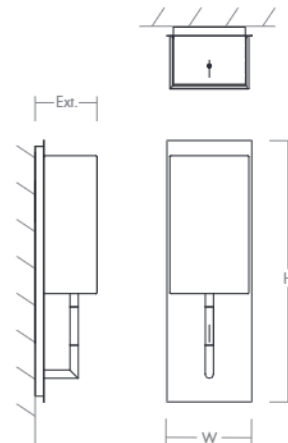

DIMENSIONS

W:	5.25"
H:	15.75"
Ext:	3.75"
M.C:	6.42" From top of fixture

Order example for standard fixture:

3-564-224 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)
 3: 120V to 277V

Order example for optional color temperatures: **3-564-27224**
 27: 2700K, 35: 3500K, 40: 4000K

