

ICON Wall Sconce

3-511-xx

oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____



-22 Oiled Bronze



-14 Polished Chrome



-24 Satin Nickel




-40 Aged Brass



With optional backplate

LIGHT SOURCE	1 x 12.1W LED, 3000K, CRI 90
LUMINAIRE POWER	14.4W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 689 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	350mA, 14.7W max power
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Polished Chrome (-14), Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	2" x 3" J-Box, 4" Octagonal J-Box*, 4" Square J-Box with a single device mud ring *Backplate required to cover J-Box
STANDARDS	UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

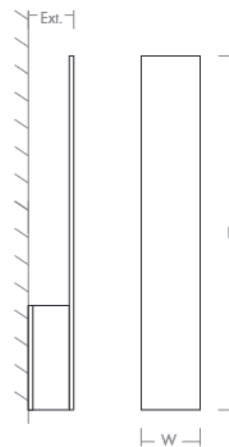

DIMENSIONS

W: 3.25"
 H: 19.5"
 Ext: 2.38"

With optional backplate

W: 4.75"
 H: 20.00"
 Ext: 2.50"
 M.C: 17.00" From top of fixture

Order example for standard fixture:

3-511-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-511-2724**

27: 2700K, 35: 3500K, 40: 4000K

