

IOTA Wall Sconce
3-554-xxxx

oxygen

FIXTURE TYPE _____
 PROJECT _____

LOCATION _____
 DATE _____




-1540 Black/Aged Brass (Lit)



-1524 Black/Satin Nickel

LIGHT SOURCE	(1x) 4.5W LED Array, 3000K, CRI 90
LUMINAIRE POWER	5.7W Input Power
RATED LIFE	30000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: 382 lm (LM-79)
INPUT VOLTAGE	120V AC, 50/60Hz
DRIVER OUTPUT	160mA, 6W max power
DIMMING	TRIAC Dimming
CONSTRUCTION	Cold Rolled Steel Housing
DIFFUSER	- Matte White Acrylic
FINISHES	Black/Aged Brass (-1540), Black/Satin Nickel
MOUNTING	(-1524) 4" Octagonal J-Box
STANDARDS	cETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

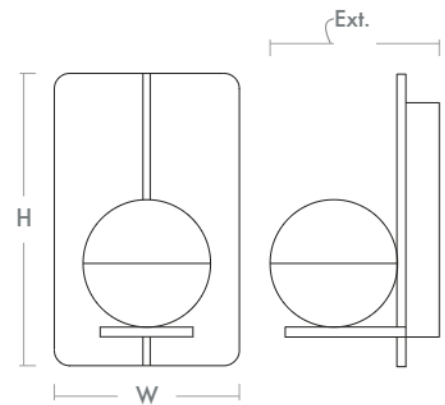

DIMENSIONS

W:	5.125"
H:	8.00"
Ext:	5.75"
M.C:	2.75" From top of fixture

Order example for standard fixture:
3-554-1524 (x-xxx: LED Sequence # / -xx: Finish)

