

# KLONE Pendant


## 32-642-xx

oxygen


FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
 PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



-20 Polished Nickel

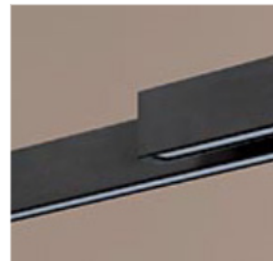


-15 Black

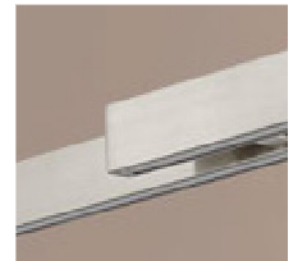

-24 Satin Nickel

LIGHT SOURCE	2 x 25W LED, 3000K, CRI 90
LUMINAIRE POWER	56.7W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 745 lm (LM-79)
INPUT VOLTAGE	120V & 277V AC, 50/60Hz
DRIVER OUTPUT*	50.4W max power @1200mA
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Black (-15), Polished Nickel (-20), Satin Nickel (-24)
MOUNTING	4" Octagonal J-Box, 4" Square J-Box with a single device mud ring
STANDARDS	UL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

\*600-1200mA programmable driver, 50.4W max power @1200mA

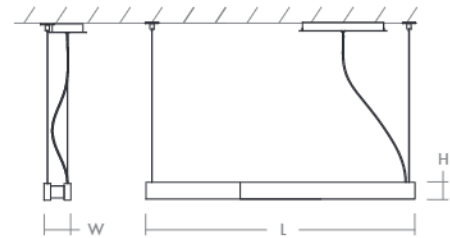

### DIMENSIONS

Canopy: 13.00" L, 5.50" W, 1.375" H

Fixture: 40.00" L, 4.00" W, 2.50" H

Suspension Length: Up to 60"

Order example for standard fixture:

**32-642-24** (x- Voltage - xxx-Sequence # - xx-Finish)

32: 120V & 277V

Order example for optional color temperatures: **32-642-2724**

27: 2700K, 35: 3500K, 40: 4000K

