

LIBERTY Pendant
3-652-xxxx


oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____



-1314 Smoked Ombre Glass/ Polished Chrome -14 Clear Glass/ Polished Chrome - 2018 Coffee Ombre Glass/ Gunmetal

LIGHT SOURCE 1 x 6.1W LED, 3000K, CRI 90
LUMINAIRE POWER 7.2W at 120V
RATED LIFE 60000 hr RL
OPTIONAL COLOR TEMPERATURES 2700K, 3500K, 4000K
LUMEN OUTPUT Delivered: 401 lm (LM-79)
INPUT VOLTAGE 120V to 277V AC, 50/60Hz
DRIVER OUTPUT 180mA, 7.6W max output
DIMMING TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION Plated Steel and Glass
DIFFUSER/ METAL FINISHES (-14) Clear Glass/Polished Chrome
 (-1314) Smoked Ombre Glass/Polished Chrome
 (-2018) Coffee Ombre Glass/Gunmetal
MOUNTING 4" Octagonal J-Box*,
 4" Square J-Box* with a single device mud ring
 *Deep J-Box (Required to house driver)
STANDARDS UL Dry/Damp listed, Conforms to UL STD 1598,
 Certified CAN/CSA STD C22.2 No 250.0.

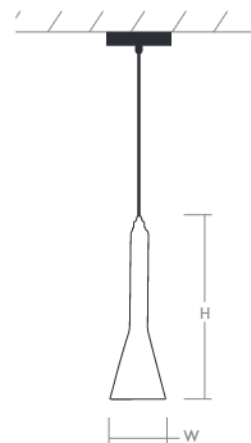

DIMENSIONS
 Dia. Canopy: 5.75"
 Dia. Fixture: 5.00"
 H. Fixture: 16.25"
 Supplied with 10 ft braided cord

Order example for standard fixture:
3-652-1314 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)
 3: 120V to 277V
 Order example for optional color temperatures: **3-652-271314**
 27: 2700K, 35: 3500K, 40: 4000K

