

LIBERTY Pendant

3-652-xxxx

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____




-1314 Smoked Ombre Glass/
Polished Chrome

-14 Clear Glass/Polished
Chrome

- 2018 Coffee Ombre Glass/
Gunmetal

LIGHT SOURCE	1 x 6.1W LED, 3000K, CRI 90
LUMINAIRE POWER	7.2W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 401 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	180mA, 7.6W max output
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Plated Steel and Glass
DIFFUSER/ METAL FINISHES	(-14) Clear Glass/Polished Chrome (-1314) Smoked Ombre Glass/Polished Chrome (-2018) Coffee Ombre Glass/Gunmetal
MOUNTING	4" Octagonal J-Box*, 4" Square J-Box* with a single device mud ring *Deep J-Box (Required to house driver)
STANDARDS	UL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

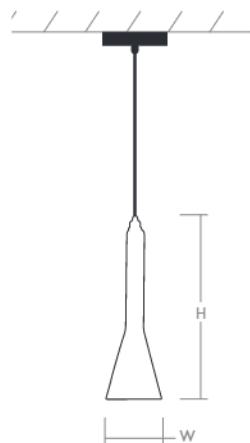

DIMENSIONS

Dia. Canopy: 5.75"

Dia. Fixture: 5.00"

H. Fixture: 16.25"

Supplied with 10 ft braided cord

Order example for standard fixture:

3-652-1314 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-652-271314**

27: 2700K, 35: 3500K, 40: 4000K

