

LUSTRE Chandelier
3-24-xx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-15 Black (stems included)



-40 Aged Brass (flush mount hardware included)

LIGHT SOURCE	(6x) 5.3W LED Arrays, 3000K, CRI 90
LUMINAIRE POWER	31.7W at 120V
RATED LIFE	30000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: 1129 lm (LM-79)
INPUT VOLTAGE	120V AC, 50/60Hz
DRIVER OUTPUT	900mA, 32.4W max power
DIMMING	TRIAC Dimming
CONSTRUCTION	Cold Rolled Steel Housing and Canopy
DIFFUSER	- Clear Bubble Glass
FINISHES	Black (-15), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box
STANDARDS	cETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

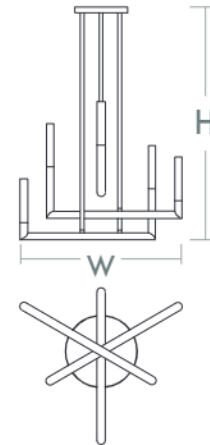

DIMENSIONS

W. Fixture: 25.25"
H. Fixture: 33.00"*
Supplied with 2-8", 2-12", and 3-16"
stems to customize hanging height
Flush mount hardware included

*Height measured using flush mount hardware

Note: Canopy swivel allows up to a 45° slope

Order example for standard fixture:
3-24-15 (x- Voltage - xxx-Sequence # - xx-Finish)
3: 120V Only

