

MAGNUM Pendant
3-653-xxx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-24 Satin Nickel



-14 Polished Chrome



-40 Aged Brass

Diffusers:




-1 White Opal Glass



- Matte White Acrylic

LIGHT SOURCE	1 x 6.1W LED, 3000K, CRI 90
LUMINAIRE POWER	7.2W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: (-1) Glass: 416 lm (LM-79) Acrylic: 383 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	180mA, 7.6W max power
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Plated Steel and Acrylic or Glass
DIFFUSER/ METAL FINISHES	(-114) White Opal Glass/Polished Chrome (-124) White Opal Glass/Satin Nickel (-140) White Opal Glass/Aged Brass (-14) Matte White Acrylic/Polished Chrome (-24) Matte White Acrylic/Satin Nickel (-40) Matte White Acrylic/Aged Brass
MOUNTING	4" Octagonal J-Box*, 4" Square J-Box* with a single device mud ring *Deep J-Box (Required to house driver)
STANDARDS	UL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

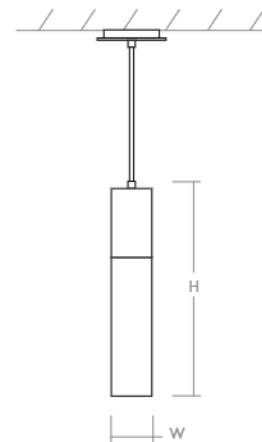

DIMENSIONS

- Dia. Canopy:** 5.88"
- Dia Fixture:** 3.50"
- H. Fixture:** 18.00"
- Supplied with 10 ft braided cord

Order example for standard fixture:
3-653-124 (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)
 3: 120V to 277V
 Order example for optional color temperatures: **3-653-27124**
 27: 2700K, 35: 3500K, 40: 4000K

