

MARIA Pendant

3-663-xxxx

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____




-1540 Dark Gray/Aged Brass Lit



-1624 Gray/Satin Nickel

LIGHT SOURCE (Not Included)	Medium Base Socket 1x 24W max PAR20/30/38, A19, A21 Lamp Not Included
LUMINAIRE POWER	Fixture certified for use with 24W medium base LED lamp
INPUT VOLTAGE	120V AC, 50/60Hz
CONSTRUCTION	Concrete and Steel
DIFFUSER	- Concrete
FINISHES	Dark Gray/Aged Brass (-1540), Gray/Satin Nickel (-1624)
MOUNTING	4" Octagonal J-Box *Junction box must be securely mounted to building structure and capable of supporting at least 50 pounds.
STANDARDS	cUL Damp Listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

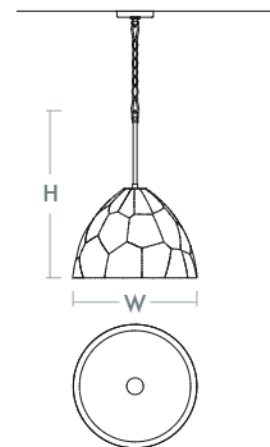

DIMENSIONS

Dia. Fixture: 16.00"

H. Fixture: 21.875"

* Measured using 1-8" stem for
minimum hanging height

Weight: 31.5 lbs.

Supplied with 2-8", 2-12", and 2-16"
stems plus 1' of chain

Order example for standard fixture:

3-663-1540 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V Only

