

**NEBULA Pendant**  
**3-680-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



-40 Aged Brass (Lit)




-15 Black



-24 Satin Nickel

<b>LIGHT SOURCE</b>	(5x) 6W LED Arrays with Driver on board, 3000K, CRI 90
<b>LUMINAIRE POWER</b>	29.1W at 120V
<b>RATED LIFE</b>	50000 hr RL
<b>OPTIONAL COLOR TEMPERATURES</b>	3000K Only
<b>LUMEN OUTPUT</b>	Delivered: 1481 lm (LM-79)
<b>INPUT VOLTAGE</b>	120V AC, 50/60Hz
<b>DRIVER OUTPUT</b>	N/A
<b>DIMMING</b>	TRIAC and ELV Dimming
<b>CONSTRUCTION</b>	Cold Rolled Steel Housing and Canopy
<b>DIFFUSER</b>	- 6" White Opal Glass
<b>FINISHES</b>	Black (-15), Satin Nickel (-24), Aged Brass (-40)
<b>MOUNTING</b>	4" Octagonal J-Box
<b>STANDARDS</b>	cETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

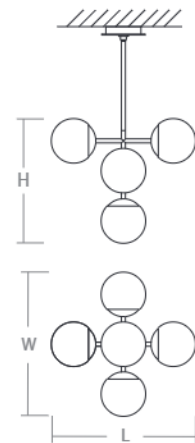

**DIMENSIONS**

**Dia. Canopy:** 4.75"/5.91" Disk  
**W. Fixture:** 19.375"  
**H. Fixture:** 16.75"  
Supplied with 2-8", 2-12", and 3-16" stems to customize hanging height

Order example for standard fixture:  
**3-680-15** (x- Voltage - xxx-Sequence # - xx-Finish)  
3: 120V Only

