

**NITRO Outdoor**  
**3-725-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_




-15 Black



-24 Satin Nickel

LIGHT SOURCE	(1x) 7.7W LED Array, 3000K, CRI 90
LUMINAIRE POWER	7.2W at 120V
RATED LIFE	30000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: TBD lm (LM-79)
INPUT VOLTAGE	120V AC, 50/60Hz
DRIVER OUTPUT	160mA, 6W max power
DIMMING	TRIAC Dimming
CONSTRUCTION	Cast Aluminum Housing
DIFFUSER	- Clear Chiseled Glass
FINISHES	Black (-15), Satin Nickel (-24)
MOUNTING	4" Octagonal J-Box (Installer must provide a bead of caulk between fixture housing and mounting surface)
STANDARDS	ETL Wet listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

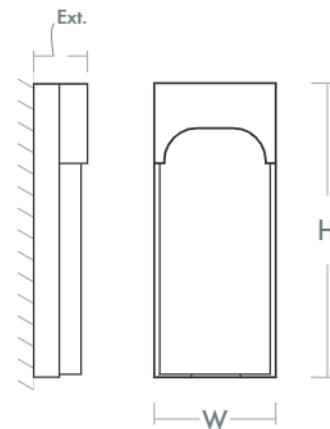

**DIMENSIONS**

W:	5.50"
H:	13.00"
Ext:	2.375"
M.C:	2.6875" From top of fixture

Order example for standard fixture:  
**3-725-15** (x- Voltage - xxx-Sequence # - xx-Finish)  
3: 120V Only

