

**PATHWAYS Wall Sconce**  
**3-523-2xx**

oxygen

FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
 PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



-95 Old World




-24 Satin Nickel

Diffuser:



-2 Matte White Acrylic

LIGHT SOURCE	1 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	12.3W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: (-2) Acrylic: 851 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	350mA, 14.7W max power
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	-2 Matte White Acrylic
FINISHES	Satin Nickel (-24), Old World (-95)
MOUNTING	4" Octagonal J-Box
STANDARDS	UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

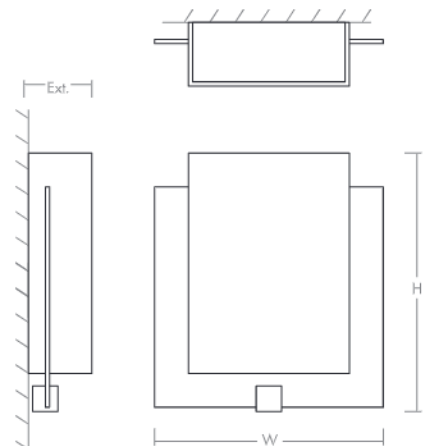

**DIMENSIONS**

**W:** 13.75"  
**H:** 15.00"  
**Ext:** 3.75"  
**M.C:** 6.875" From top of fixture

Order example for standard fixture:  
**3-523-224** (x- Voltage - xxx-Sequence # - x-Diffuser - xx-Finish)  
 3: 120V to 277V  
 Order example for optional color temperatures: **3-523-27224**  
 27: 2700K, 35: 3500K, 40: 4000K

