


**PRESTO! Chandelier**  
**3-657-xx**

oxygen


FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
 PROJECT \_\_\_\_\_ DATE \_\_\_\_\_



-15 Black

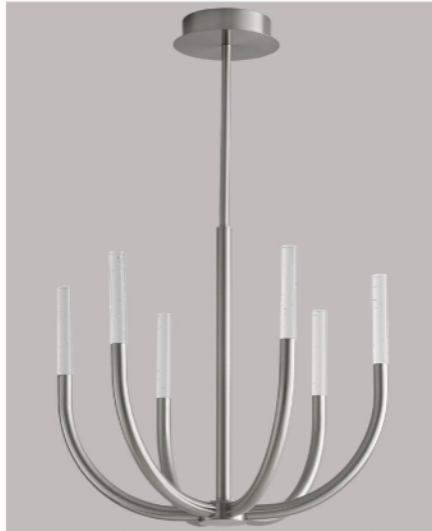


-24 Satin Nickel

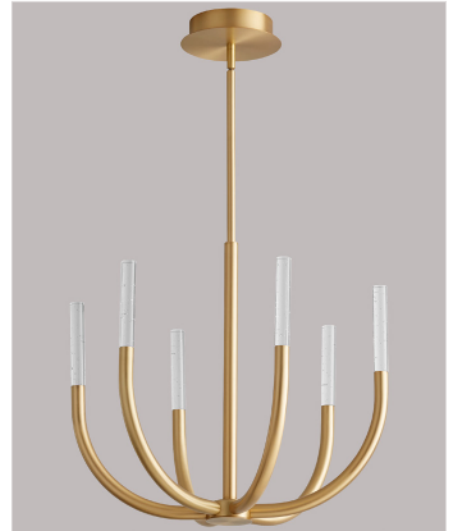

-40 Aged Brass

LIGHT SOURCE	(6x) 4.8W LED Arrays, 3000K, CRI 90
LUMINAIRE POWER	32W at 120V
RATED LIFE	26000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: 623.5 lm (LM-79)
INPUT VOLTAGE	120V AC, 50/60Hz
DRIVER OUTPUT	900mA, 32.4W max power
DIMMING	TRIAC and ELV Dimming
CONSTRUCTION	Cold Rolled Steel Housing and Canopy
DIFFUSER	- Clear Bubble Glass
FINISHES	Black (-15), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box
STANDARDS	cETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

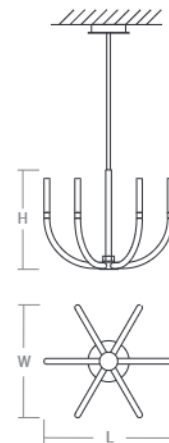

**DIMENSIONS**

**Dia. Canopy:** 5.875"/7.1" Disk  
**W. Fixture:** 22.25"  
**L. Fixture:** 22.25"  
**H. Fixture:** 19.5"  
 Supplied with 2-8", 2-12", and 3-16" stems to customize hanging height

Order example for standard fixture:  
**3-657-15** (x- Voltage - xxx-Sequence # - xx-Finish)  
 3: 120V Only

