

RUVO Pendant

120v : **3-6202-xx**

oxygen

FIXTURE TYPE _____ LOCATION _____

PROJECT _____ DATE _____




-25 Satin Copper

-22 Oiled Bronze

-24 Satin Nickel

LIGHT SOURCE	1 x 24W LED max. Medium Base PAR20/30/38; Medium Base A19, A21. (Lamp not included)
LUMINAIRE POWER	Power varies based on lamp used
RATED LIFE	See LED bulb manufacturer specification
LUMEN OUTPUT	Lumen output varies based on lamp used
INPUT VOLTAGE	120V
DRIVER OUTPUT	N/A
CONSTRUCTION	Plated Steel and Glass
DIFFUSER	- White Tiffany Glass
FINISHES	Oiled Bronze (-22), Satin Nickel (-24), Satin Copper (-25)
MOUNTING	4" Octagonal J-Box
STANDARDS	UL Dry/Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

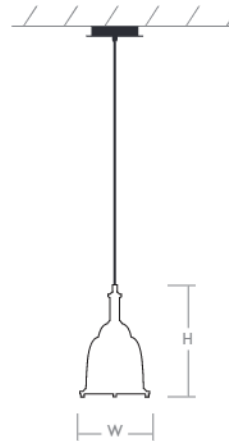

DIMENSIONS

Dia. Canopy: 6.50"

Dia. Fixture: 10.50"

H. Fixture: 16.50"

Suspension Length: Up to 60"

Note: Customer must specify desired length of downrod.

Order example for standard fixture:

3-6202-24 (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120v

