

SPACELY Pendant
3-646-1540

oxygen


FIXTURE TYPE _____
 PROJECT _____

LOCATION _____
 DATE _____



-1540 Black/Aged Brass

LIGHT SOURCE	(1x) 12.5W LED Array, 3000K, CRI 90
LUMINAIRE POWER	12.8W at 120V
RATED LIFE	30000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: 669 lm (LM-79)
INPUT VOLTAGE	120V AC, 50/60Hz
DRIVER OUTPUT	300mA, 10.8W max power
DIMMING	TRIAC Dimming
CONSTRUCTION	Cold Rolled Steel Housing and Canopy
DIFFUSER	- Matte White Acrylic
FINISHES	Black/Aged Brass (-1540)
MOUNTING	4" Octagonal J-Box
STANDARDS	cETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

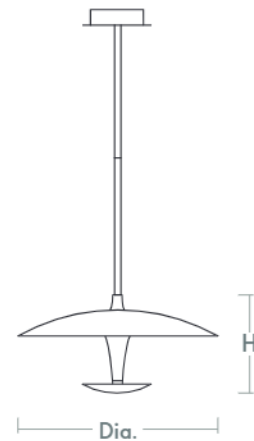

DIMENSIONS

Dia. Fixture: 17.75"
H. Fixture: 8.625"
 Supplied with 2-8", 2-12", and 3-16"
 stems to customize hanging height

Note: Canopy swivel allows up to a 45° slope

Order example for standard fixture:
3-646-1540 (x- Voltage - xxx-Sequence # - xx-Finish)
 3: 120V Only

