

**UNO Wall Sconce**  
**3-500-xx**

oxygen

FIXTURE TYPE \_\_\_\_\_

LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-18 Gunmetal



-24 Satin Nickel




-40 Aged Brass



With optional backplate

<b>LIGHT SOURCE</b>	1 x 7W Max LED GU10 Base (Lamp not included)
<b>LUMINAIRE POWER</b>	7.08W at 120V
<b>RATED LIFE</b>	See LED lamp manufacturer specification
<b>LUMEN OUTPUT</b>	Delivered: 258 lm (LM-79)**
<b>INPUT VOLTAGE</b>	120V
<b>DRIVER OUTPUT</b>	N/A
<b>CONSTRUCTION</b>	Plated Steel and Glass
<b>DIFFUSER</b>	- Frosted Glass
<b>FINISHES</b>	Gunmetal (-18), Satin Nickel (-24), Aged Brass (-40)
<b>MOUNTING</b>	2" x 3" J-Box, 4" Octagonal J-Box*, 4" Square J-Box with a single device mud ring *Backplate required to cover J-Box
<b>STANDARDS</b>	UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.  **Lumen Output may vary based on the lamp that is used

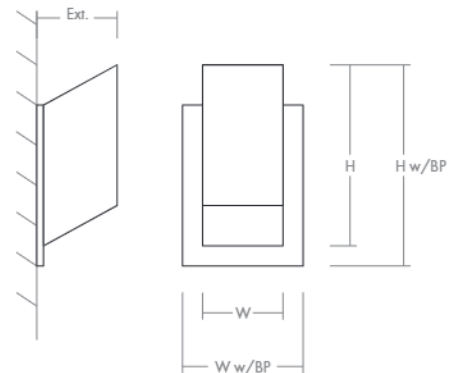

**DIMENSIONS**

**W:** 3.00"  
**H:** 6.75"  
**Ext:** 3.00"  
**M.C:** 4.20" From top of fixture

**With optional backplate**

**W:** 4.75"  
**H:** 7.66"  
**Ext:** 3.125"  
**M.C:** 4.20" From top of fixture

Order example for standard fixture:  
**3-500-24** (x- Voltage - xxx-Sequence # - xx-Finish)  
3: 120V

