



WAND Wall Sconce
3-55-xx

oxygen


FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____

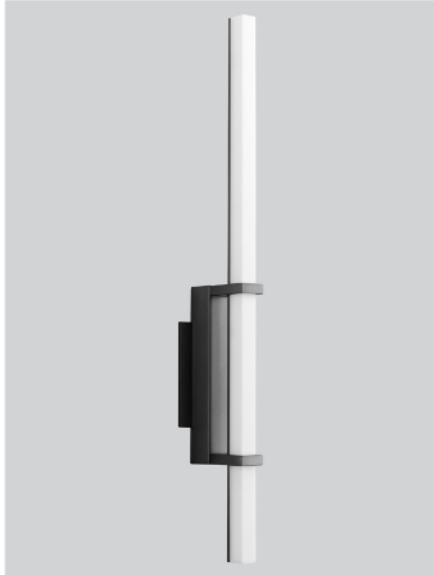

-15 Black

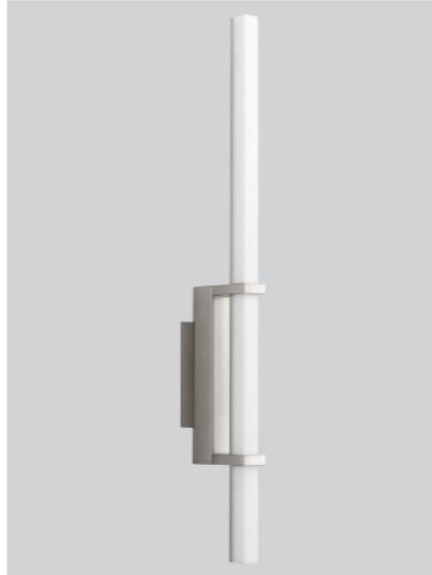


-24 Satin Nickel

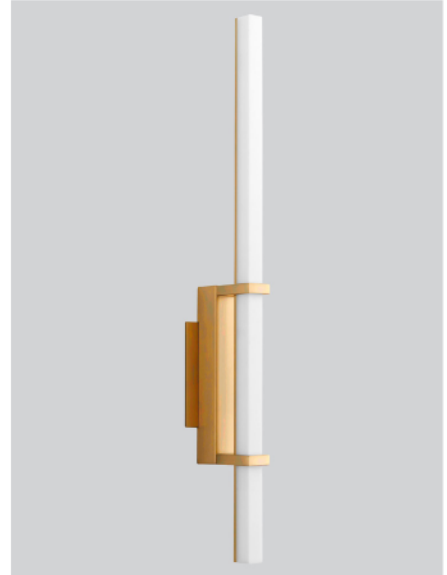

-40 Aged Brass

LIGHT SOURCE	1x 24.7W LED, 3000K, CRI 90
LUMINAIRE POWER	28.6W Input Power at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: 1977 lm (LM-79)
INPUT VOLTAGE	120V & 277V AC, 50/60Hz
DRIVER OUTPUT*	29.4W max power @700mA
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Cold Rolled Steel Housing
DIFFUSER	- Matte White Acrylic
FINISHES	Black (-15), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	<u>With Small Backplate</u> - 2"x3" J-Box, 4" Square J-Box w/ single device mud ring <u>With Large Backplate</u> - 2"x3" J-Box, 4" Octagonal J-Box
STANDARDS	cUL Damp Listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

*600-1200mA programmable driver, 50.4W max power @1200mA

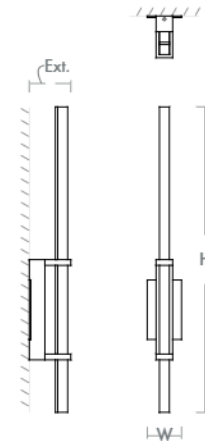

DIMENSIONS

W:	2.75"
H:	24.38"
Ext:	3.33"
M.C:	16.19" From top of fixture

Order example for standard fixture:
3-55-24 (x-xxx: LED Sequence # / -xx: Finish)

