


# WAND Vanity


## 3-56-xx

oxygen


FIXTURE TYPE \_\_\_\_\_ LOCATION \_\_\_\_\_  
 PROJECT \_\_\_\_\_ DATE \_\_\_\_\_

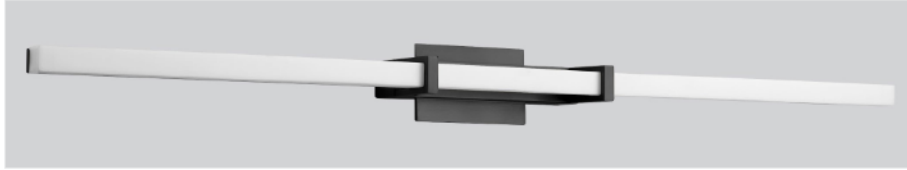

-15 Black

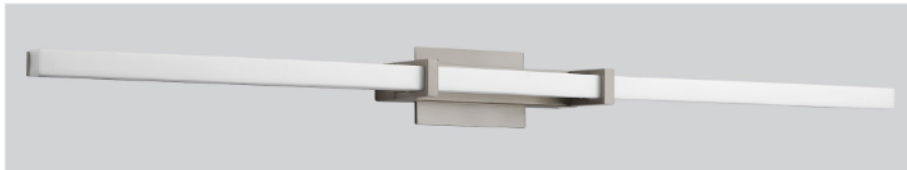


-24 Satin Nickel

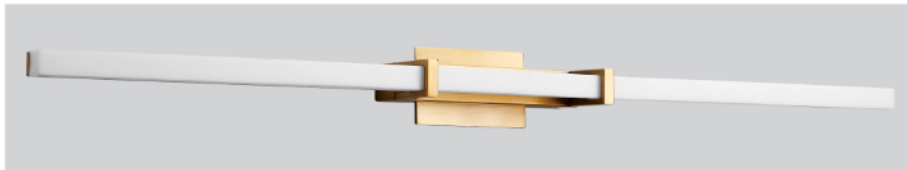

-40 Aged Brass

**LIGHT SOURCE** 1x 37.0W LED, 3000K, CRI 90  
**LUMINAIRE POWER** 43.2W Input Power at 120V  
**RATED LIFE** 60000 hr RL  
**OPTIONAL COLOR TEMPERATURES** 3000K Only  
**LUMEN OUTPUT** Delivered: 3049 lm (LM-79)  
**INPUT VOLTAGE** 120V & 277V AC, 50/60Hz  
**DRIVER OUTPUT\*** 44.1W max power @1050mA  
**DIMMING** TRIAC and ELV dimming at 120V AC;  
 0-10V dimming, 100% to 1% current output  
**CONSTRUCTION** Cold Rolled Steel Housing  
**DIFFUSER** - Matte White Acrylic  
**FINISHES** Black (-15), Satin Nickel (-24), Aged Brass (-40)  
**MOUNTING** With Small Backplate - 2"x3" J-Box, 4" Square J-Box w/ single device mud ring  
With Large Backplate - 2"x3" J-Box, 4" Octagonal J-Box  
**STANDARDS** cUL Damp Listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

\*600-1200mA programmable driver, 50.4W max power @1200mA

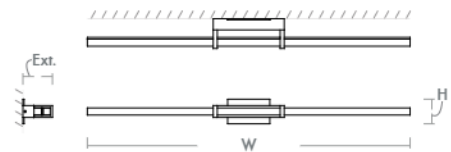

### DIMENSIONS

**W:** 36.38"  
**H:** 2.75" with Small Backplate  
 4.75" with Large Backplate  
**Ext:** 3.33"  
**M.C:** 18.19" From side of fixture

Order example for standard fixture:  
**3-56-24** (x-xxx: LED Sequence # / -xx: Finish)

