

# ZETA Wall Sconce / Ceiling Mount

## 3-530-xx

oxygen

FIXTURE TYPE \_\_\_\_\_


LOCATION \_\_\_\_\_

PROJECT \_\_\_\_\_

DATE \_\_\_\_\_



-40 Aged Brass

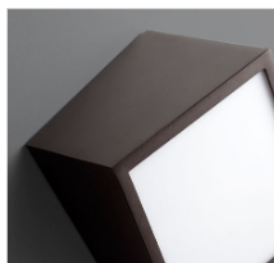


-22 Oiled Bronze



-24 Satin Nickel

LIGHT SOURCE	1 x 10.1W LED, 3000K, CRI 90
LUMINAIRE POWER	12.4W at 120V
RATED LIFE	60000 hr RL
OPTIONAL COLOR TEMPERATURES	2700K, 3500K, 4000K
LUMEN OUTPUT	Delivered: 361 lm (LM-79)
INPUT VOLTAGE	120V to 277V AC, 50/60Hz
DRIVER OUTPUT	350mA, 14.7W max power
DIMMING	TRIAC and ELV dimming at 120V AC; 0-10V dimming, 100% to 1% current output
CONSTRUCTION	Plated Steel and Acrylic
DIFFUSER	- Matte White Acrylic
FINISHES	Oiled Bronze (-22), Satin Nickel (-24), Aged Brass (-40)
MOUNTING	4" Octagonal J-Box, 2" x 3" J-Box, 4" Square J-Box with a single device mud ring
STANDARDS	UL Dry/Damp listed, ADA Compliant, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

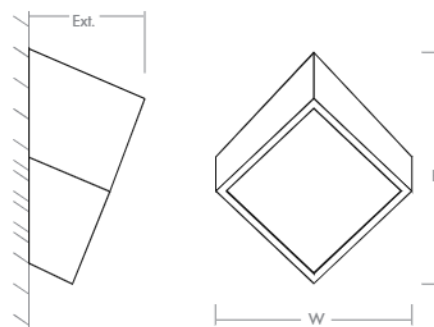

### DIMENSIONS

W:	6.75"
H:	7.75"
Ext:	4.00"
M.C:	3.59" From top of fixture

Order example for standard fixture:

**3-530-22** (x- Voltage - xxx-Sequence # - xx-Finish)

3: 120V to 277V

Order example for optional color temperatures: **3-530-2722**

27: 2700K, 35: 3500K, 40: 4000K

