

NERO Pendant
3-686-1540

oxygen

FIXTURE TYPE _____

LOCATION _____

PROJECT _____

DATE _____



-1540 Black/Aged Brass (Lit)

LIGHT SOURCE (26x) 2.1W LED Arrays, 3000K, CRI 90

LUMINAIRE POWER 64.3W at 120V

RATED LIFE 30000 hr RL

OPTIONAL COLOR TEMPERATURES 3000K Only

LUMEN OUTPUT Delivered: 2045 lm (LM-79)

INPUT VOLTAGE 120V AC, 50/60Hz

DRIVER OUTPUT 720mA, 30.24W max power per driver (2 drivers total - 60.48W total max output)

DIMMING TRIAC Dimming


CONSTRUCTION Cold Rolled Steel Housing and Canopy

DIFFUSER - Frosted Acrylic

FINISHES Black/Aged Brass (-1540)

MOUNTING 4" Octagonal J-Box

STANDARDS cETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

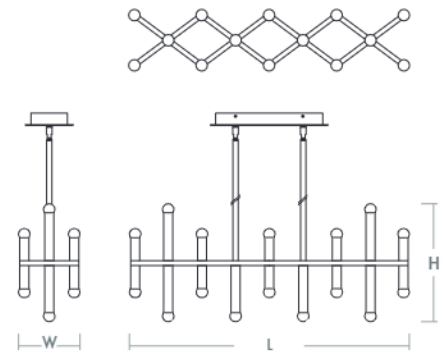

DIMENSIONS

W. Fixture: 7.375"
L. Fixture: 33.50"
H. Fixture: 14.125"
 Supplied with 2-8", 2-12", and 3-16" stems to customize hanging height

Note: Canopy swivel allows up to a 20° slope

Order example for standard fixture:
3-686-1540 (x- Voltage - xxx-Sequence # - xx-Finish)
 3: 120V Only

