

INSTALLATION INSTRUCTIONS

Item#N7352-790 (New. 10/13/2021)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

PREPARATION (Fig. 1)

1. Shut off power at the fuse box or circuit breaker box and remove the old fixture including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts in a clean area. Take care not to misplace any small parts necessary for installation.

ASSEMBLING THE FIXTURE (Fig. 1)

3. Secure crossbar (A) to junction box (Not included) with mounting screws (B) (Size: #8-32N*L1"). The side of crossbar marked "GND" must face out.
4. Thread one end of all thread (C) into crossbar (A), tighten with lock washer and hex nut. The length of all thread (C) may be adjusted if necessary.

CONNECTING THE WIRES (Fig. 2)

5. Connect the electrical wires as shown in Fig. 2, making sure that all wire connectors are secured. If your junction box has a ground wire (green or bare copper), connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the crossbar (A) using the green screw provided.
6. Tuck wire connections neatly into junction box.

COMPLETING THE INSTALLATION (Fig. 1)

7. Place back plate (G) of fixture body (F) to all thread (C) and secure with finial (D).
8. Install (2) two candelabra base bulbs (E) up to 60 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification.
**—DO NOT EXCEED THE MAXIMUM WATTAGE RATING!
(NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!).**

Your installation is now complete. Return power to the junction box and test the fixture.

Note: Illustration (Fig. 1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.

Fig. 1

Set#A-010
- Crossbar
- Ground Screw
- Mounting Screw *2

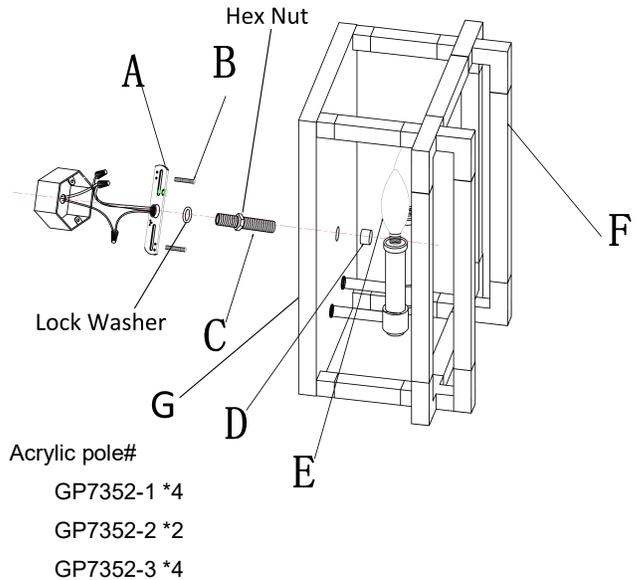


Fig. 2

