

INSTALLATION INSTRUCTIONS

Item#N7389-613 (New. 2022/05/15)

READ AND SAVE THESE INSTRUCTIONS

WARNING! SHUT POWER OFF AT FUSE OR CIRCUIT BREAKER.

AVERTISSEMENT! COUPER LE COURANT AU NIVEAU DES FUSIBLES OU DU DISJONCTEUR.

MOUNTING THE FIXTURE (Fig.1)

1. Shut off the power at the circuit breaker and remove the old fixture, including the mounting hardware.
2. Carefully unpack your new fixture and lay out all the parts on a clean area. Take care not to lose any small parts necessary for installation.
3. Secure rod (M) onto all thread (N) on fixture body and place coupling (O) over all thread of rod (M).
4. Determine desired hanging height and thread rods (F1,F2,F3) to all thread on rod (M). Attach canopy (D) by threading onto rod (F1). Carefully pass wires through each rod during assembly. Note: Remove all thread, if installing with one 6" rod only.
5. Position mounting plate (A) on ceiling and mark location of the two mounting holes. Drill holes on ceiling and insert plastic anchors (P).
6. Attach mounting plate (A) to junction box (not included) with mounting screws (B) (Size: #8-32N*L0.5") and wood screws (Q) into drywall anchors (P). The side of mounting plate marked "GND" must face out.
7. The support cable is provided to support weight of fixture while wiring. Align fixture to mounting cable (C) and attach hook (G) on the end of support cable (C) into a slot located on mounting plate (A). Carefully allow support cable (C) to support weight of fixture while wiring (Fig.1).

CONNECTING THE WIRES (Fig. 2)

8. Connect the electrical wires as shown in Fig.2, making sure that all wire connectors are secured. If junction box has a ground wire (green or bare copper), connect fixture's ground wire to it. Otherwise, connect fixture's ground wire directly to mounting plate (A) using green screw provided.
9. Tuck the wire connections neatly into junction box.

FINISHING THE INSTALLATION (Fig.1)

10. Place canopy (D) over mounting plate (A) and secure with screws (E).
11. Thread acrylic rods (H1), (H2), (H3), (H4) into couplers (L1), (L2), (L3), (L4).
12. Place glass shade (R) followed by metal ring (S) over socket (K) and secure with screw shell (T).
13. Install (9) nine medium base bulbs (U) up to 100 watts each or CFL or LED equivalent (not included) in accordance with the fixture specification. — **DO NOT EXCEED THE MAXIMUM WATTAGE RATING! (NE PAS DEPASSER LA PUISSANCE NOMINALE MAXIMALE!)**
14. Place cloth shade (V) onto the glass shade (R).
15. Secure finial (J) onto all thread (I) on fixture body.

Your installation is now complete. Return power to the junction box and test the fixture.

Fig. 1

Set#A-021-143D

-Mounting Screw *2

-Ground Screw

-Mounting Plate

Rod# W35-1-613 *1 (F1)
W35-1-613 *2 (F2)
W35-H-613 *1 (F3)

Acrylic rod:

H1:L135mm *6pcs

H2:L180mm *6pcs

H3:L300mm *6pcs

H4:L340mm *6pcs


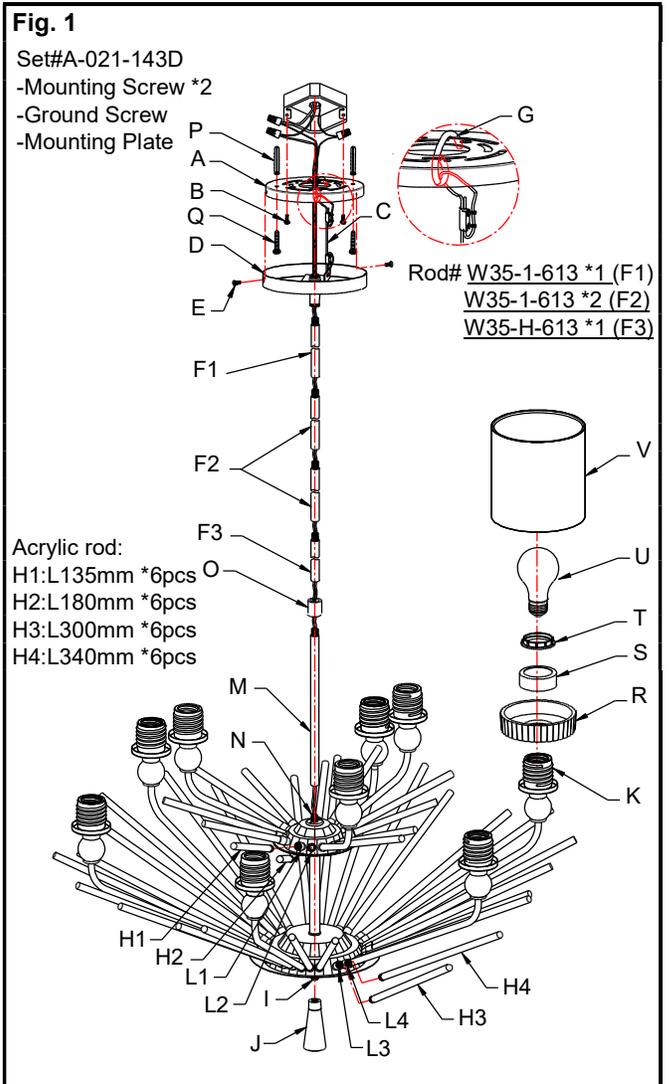


Fig. 2

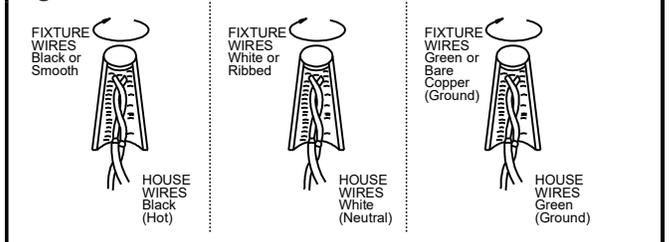

Note: Illustration (Fig.1) on this manual is for installation purposes only. It may or may not be identical to the fixture purchased.