

ALGORITHM

Design by Toan Nguyen.

VIBIA

Reference

0820.

Application

Pendants

Installation type

Surface mounted

Description

Pendant light fitting designed by Toan Nguyen. Composed of a collection of hand blown glass spheres with LED light source suspended at different heights, anchored to the ceiling via a floating tubular structure.

Diffuser

Polycarbonate diffuser

Materials

Sphere: Blown glass
Pendant structure: Steel
Canopy: Steel
Diffuser: Polycarbonate

Finishes




0820-18 Black (ADAPTA RF 9913 WX)



0820-93 White (RAL 9016)

Sketch

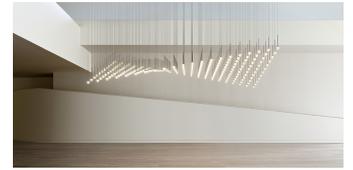

Light source: 2700K CRI >80 312 lm 99 lm/W

Fixture: 155 lm 49 lm/W

Driver included: CC - Constant Current 1050 mA 120-277V 50/60Hz

Electronic dimming: 0-10V

Optional dimming: DALI or Lutron ECO

Technical characteristics

- Cable can be adjusted in the field. 157" max.


Installation and assembly

Please see the installation manual

Light distribution

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric data

Certificates



Electrical characteristics

1 x LED 3.15W 1050mA

Total 3.2 W

