

ORIGAMI

Design by Ramón Esteve.

Reference

4500.

Application

Outdoor

Installation type

Surface mounted

Description

ORIGAMI blends light functionality with an opportunity for artistic creation. With just two pieces, designers can create infinite compositions. With a single connection point between the pieces and simple surface mounting installation, create beautiful and original LED wall art. ORIGAMI lighting is rated for both outdoor (IP65 and UL WET location listed) and indoor settings.

Diffuser

Polycarbonate diffuser

Materials

Shade: ABS

Lid: Polycarbonate

Finishes


 **4500-10** White (NCS S 0300-N)

 **4500-29** Brown D1 (NCS S 8005-Y50R)

 **4500-38** Terra Dark (NCS S 5040-Y70R)

 **4500-53** Green M1 (NCS S 6005-G80Y)

Sketch




Electrical characteristics

1 x LED STRIP 6.3W 350mA

Total 6.3 W



VIBIA



Light source: 2700K CRI >80 756 lm 120 lm/W

Fixture: 460 lm 66 lm/W

Driver included: CC - Constant Current 350 mA 120V 50/60Hz

Electronic dimming: TRIAC

Technical characteristics

- A maximum of 30 modules can be connected to a single connection point. For bigger compositions, check connection system.


Installation and assembly

Please see the installation manual


Light distribution

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric data

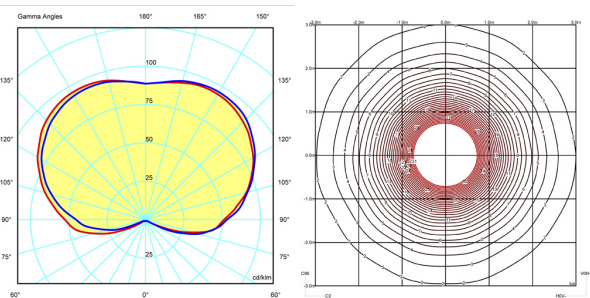

Certificates

