

# PIN

Design by Ichiro Iwasaki.

## Reference

**1694.**

## Application

Wall Fixtures

## Installation type

Surface mounted

## Description

Wall lamp. Design by Ichiro Iwasaki. Wall light which provides passageways with ambient illumination via indirect light. Available in black and cream matte finishes.

## Diffuser

Polycarbonate diffuser

## Materials

Head: Aluminum

Base: Zinc aluminum alloy

Diffuser: Polycarbonate

Rods: Steel

## Finishes




**1694-04** Black (NCS 9000N)



**1694-58** Cream (NCS S 2005-Y20R)

## Sketch



## Electrical characteristics

2 x LED 4.5W 350mA

Total 9.0 W



# VIBIA



**Light source:** 2700K CRI >90 900 lm 109 lm/W

**Fixture:** 417 lm 0 lm/W

**Driver included:** CC - Constant Current 350 mA 100-240V 50/60Hz

**Electronic dimming:** NO DIMMING


## Installation and assembly

Please see the installation manual

## Light distribution

### Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



## Photometric data

Efficiency : 46.35%

Coordinate system : CG

Total flux : 900.00

Maximum value : 192.66


Light position : C=340.00 G=10.00

Symmetry on the planes : Asymmetric

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=2.50m

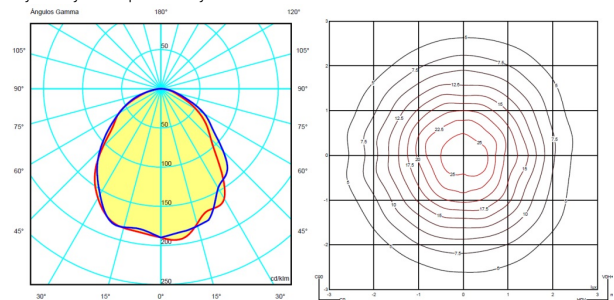

## Certificates

