

RHYTHM

Design by Arik Levy.

Reference

2120.

Application

Pendants

Description

Diffuser

Polycarbonate diffuser

Materials

Stick: Polyamide 6 with 10% of Fiberglass

Diffuser: Polycarbonate

Finishes




2120-14 Dark chocolate matte lacquer (RAL 8019)



2120-58 Off-white (D2-1109005 Matt beige)

Sketch




Electrical characteristics

10 x LED STRIP 30V 5.8W

Total 58.0 W



VIBIA



Light source: 2850K CRI >80 6920 lm 119 lm/W

Fixture: 2371 lm 41 lm/W

Driver included: CV - Contant Voltage 120-277V 50/60Hz

Electronic dimming: 1-10V

Technical characteristics

- 0-10V Electronic dimming

- Multi-volt electronic driver 120-277V


Installation and assembly

Please see the installation manual

Light distribution

General lighting - opaque shade

Fixture suitable for general ambient illumination, distributing light mainly upward and/or downward.



Photometric data

Efficiency : 34.26%

Coordinate system : CG

Total flux : 6920.00

Maximum value : 119.04


Light position : C=0.00 G=0.00

Symmetry on the planes : Double symmetrical

Isolux : Floor

Light position :

X=0.00m Y=0.00m Z=3.00m

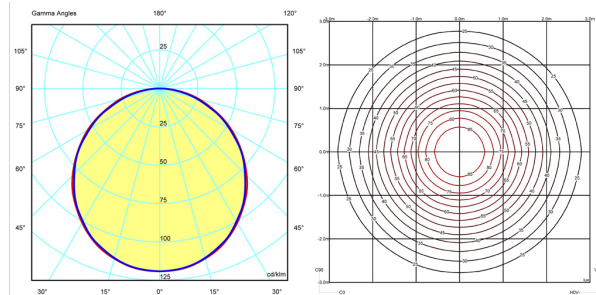

Certificates

