# CTOLIGHTING

# MODULO CHANDELIER GRID 11

#### FINISH

bronze with smoked kiln cast glass and opal glass shades satin brass with smoked kiln cast glass and opal glass shades

## DIMENSIONS (body of fixture)

1665 x 1050 x 100 mm (w x d x h)

## WEIGHT

18kg (39.7lbs) please ensure ceiling structure is strong enough to support the weight of the light

## OVERALL DROP

minimum 145 mm maximum on request 6125 mm supplied with 1000 mm drop rod

#### ILLUMINATION

220-240v - integrated mains LED - 49.5w - 2700k 110-130v - integrated mains LED - 49.5w - 2700k

#### DIMMING

trailing dimmable / phase cut (rotary dimmer) - standard \* DALI option available (220-240v only), see next page

## **CEILING ROSE / PLATE**

round ceiling rose - ø 116 x 25 mm (dia x h)

E492308

116mm

(4.6)


25mm

Ξ


min 20mm (0.8)

100mm (3.9)

# CERTIFICATION



mounting plate dimensions



#### \*Diagrams are not to scale.

Ħ

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
MODCH11BZSKMO-240	bronze with smoked kiln cast glass and opal glass shades	220 - 240V
MODCH11SBSKMO-240	satin brass with smoked kiln cast glass and opal glass shades	220 - 240V
MODCH11BZSKMO-110	bronze with smoked kiln cast glass and opal glass shades	110 - 130V
MODCH11SBSKMO-110	satin brass with smoked kiln cast glass and opal glass shades	110 - 130V

# CTQLIGHTING

# MODULO CHANDELIER GRID 11 - DALI-A

#### FINISH

bronze with smoked kiln cast glass and opal glass shades satin brass with smoked kiln cast glass and opal glass shades

## DIMENSIONS (body of fixture)

1665 x 1050 x 100 mm (w x d x h)

#### WEIGHT

18kg (39.7lbs) please ensure ceiling structure is strong enough to support the weight of the light

## OVERALL DROP

minimum 145 mm maximum on request 6125 mm supplied with 1000 mm drop rod

### ILLUMINATION

220-240v - integrated mains LED - 49.5w - 2700k DALI converter to be installed in the ceiling cavity converter can be placed up to 2m away from the light fixture

#### DIMMING

DALI compatible

# CEILING ROSE / PLATE

116mm (4.6)

25mm (1)


min 20mm (0.8)

100mm (3.9)

コ


round ceiling rose - ø 116 x 25 mm (dia x h)

# CERTIFICATION

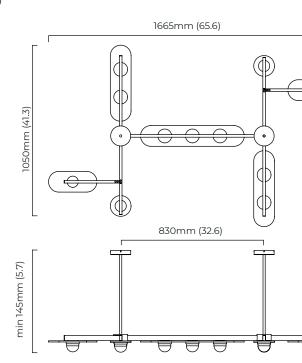




#### mounting plate dimensions



#### DALI converter dimensions



\*Diagrams are not to scale.

Ħ

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
MODCH11BZSKMO-DALIA-240	bronze with smoked kiln cast glass and opal glass shades	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
MODCH11SBSKMO-DALIA-240	satin brass with smoked kiln cast glass and opal glass shades	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V

# CTQLIGHTING

# MODULO CHANDELIER GRID 11 - DALI-B

#### FINISH

bronze with smoked kiln cast glass and opal glass shades satin brass with smoked kiln cast glass and opal glass shades

#### DIMENSIONS (body of fixture)

1665 x 1050 x 100 mm (w x d x h)

#### WEIGHT

18kg (39.7lbs) please ensure ceiling structure is strong enough to support the weight of the light

#### OVERALL DROP

minimum 155 mm maximum on request 6135 mm supplied with 1000 mm drop rod

#### ILLUMINATION

220-240v - integrated mains LED - 49.5w - 2700k DALI converter to be installed in the ceiling rose

# DIMMING


DALI compatible

# CEILING ROSE / PLATE

round ceiling rose - ø 140 x 35 mm (dia x h)

## CERTIFICATION



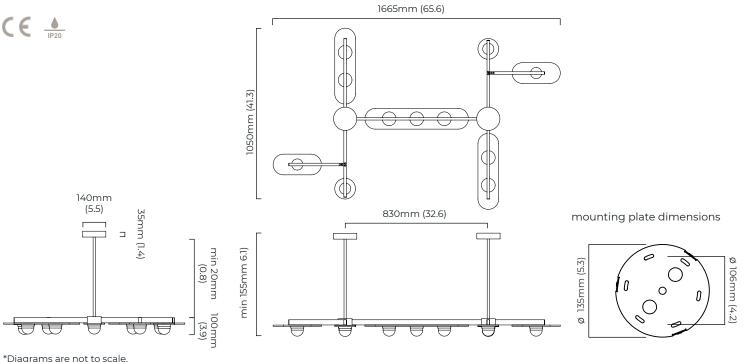

SKU NUMBER FINISH DESCRIPTION TYPE OF DALI VOLTAGE bronze with smoked kiln cast glass DALI B included - The light will feature a deeper ceiling/wall rose. MODCH11BZSKMO-DALIB-240 220 - 240V and opal glass shades For use when there is no space in the existing ceiling/wall cavity satin brass with smoked kiln cast glass DALI B included - The light will feature a deeper ceiling/wall rose. MODCH11SBSKMO-DALIB-240 220 - 240V and opal glass shades For use when there is no space in the existing ceiling/wall cavity