CTOLIGHTING

MODULO WALL SINGLE

FINISH

bronze with smoked kiln cast glass and opal glass shades satin brass with smoked kiln cast glass and opal glass shades

DIMENSIONS (body of fixture)

 $120 \times 80 \times 280 \text{ mm} (w \times d \times h)$

WEIGHT

1kg (2.2lbs)

ILLUMINATION

220-240v - integrated mains LED - 4.5w - 2700k 110-130v - integrated mains LED - 4.5w - 2700k


DIMMING

trailing dimmable / phase cut (rotary dimmer) - standard * DALI option available (220-240v only), see next page


CEILING ROSE / PLATE rectangular wall box - $34 \times 132 \times 15$ mm (w x d x h)

CERTIFICATION








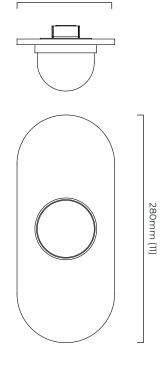


120mm (4.7)





North Ar	merica
iunction	hox cove



SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
MODWA1BZSKMO-240	bronze with smoked kiln cast glass and opal glass shades	220 - 240V
MODWAISBSKMO-240	satin brass with smoked kiln cast glass and opal glass shades	220 - 240V
MODWA1BZSKMO-110	bronze with smoked kiln cast glass and opal glass shades	110 - 130V
MODWAISBSKMO-110	satin brass with smoked kiln cast glass and opal glass shades	110 - 130V

CTOLIGHTING

MODULO WALL SINGLE - DALI-A

FINISH

bronze with smoked kiln cast glass and opal glass shades satin brass with smoked kiln cast glass and opal glass shades

DIMENSIONS (body of fixture)

120 x 80 x 280 mm (w x d x h)

WEIGHT

1kg (2.2lbs)

ILLUMINATION

220-240v - integrated mains LED - 4.5w - 2700k DALI converter to be installed in the wall cavity converter can be placed up to 2m away from the light fixture

DIMMING


DALI compatible

CEILING ROSE / PLATE

rectangular wall box - $34 \times 132 \times 15 \text{ mm}$ (w x d x h)


CERTIFICATION



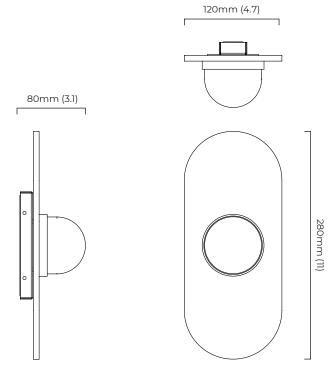




mounting plate dimensions



DALI converter dimensions



^{*}Diagrams are not to scale.

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
MODWAIBZSKMO-DALIA-240	bronze with smoked kiln cast glass and opal glass shades	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
MODWATSBSKMO-DALIA-240	satin brass with smoked kiln cast glass and opal glass shades	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V