



# ULLI

3810 - LAMP H.12 IN.  
DESIGN BY STUDIO FERMOb

NEW RESIDENTIAL CONTRACT INTENSIVE




Polycarbonate diffuser  
Aluminium frame  
ABS Base  
Technology: integrated LED - Luminous flux: 220 lm  
Switch type: touch-activated dimmer  
Function of the switch: change the light temperature (clic 1s),  
change the brightness (10 to 100%, click 4 s),  
change the light temperature (double short click), ON/OFF (short click, 1s)  
Lighting mood:  
Position 1 warm white (3000°K) dimmer switch (10 to 100%)  
Position 2 cool white (6000°K) dimmer switch (10 to 100%)  
Type of power supply: battery - Min. Battery life (100%): 6 h  
Battery use cycle: 300 cycle  
Recharge time: 4h - Type of recharge : USB Fermob magnet – Cable (provided) 59 in.  
Bypass to prevent battery damage during wired use  
2 A - 5 V - 3 W - IP54 (Ingress protection) | IK 6 (Impact resistance) | CE | FCC | UKCA  
Energy rating: F  
*Powered by Smart & Green*



3 lbs

- 381067 ● Poppy
- 381002 ● Cedar green
- 381092 ● Deep blue
- 3810C6 ● Honey

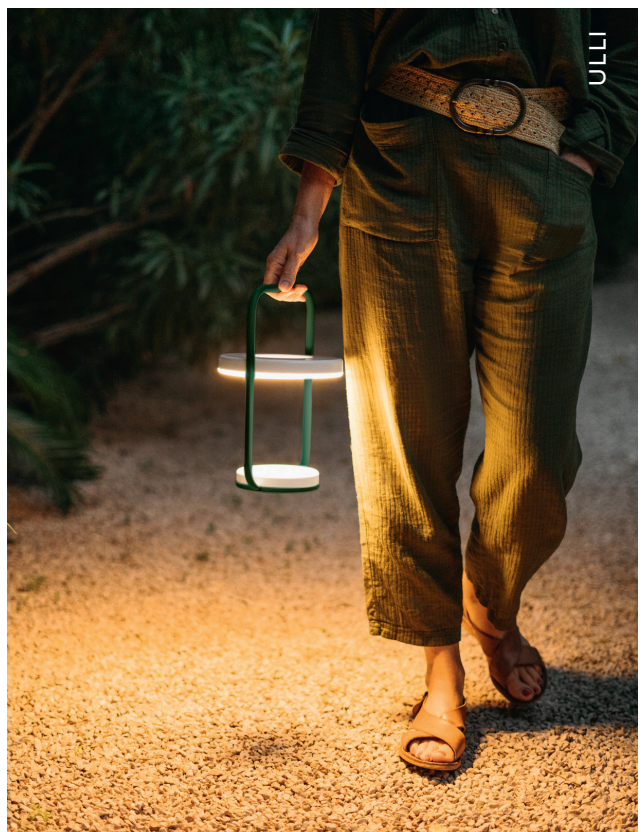





ULLI

LIGHTING