# **ASSEMBLY INSTRUCTIONS**

## ITEM DESCRIPTION:


ITEM NO.: 44367 NAME: Myrtle Sconce

MATERIAL TYPE: Brass FINISH: Vintage Brass

SOCKET TYPE: E26 SOCKET QTY: 1

BULB WATTAGE: 40W/10W CFL/9W LED

VOLTAGE: 110-120V ITEM NET WEIGHT: 7.5LBS



## PARTS INCLUDED:

Mounting Plate	Qty: 1
Back Plate	Qty: 1
Brass Shade	Qty: 1
Socket Assembly	Qty: 1
Metal Ring	Qty: 1
Plate Screw	Qty: 1

### HARDWARE INCLUDED:


(C) Mounting Screws	Qty: 2	
(A) Plastic Wire Connector	Qty: 3	
(B) Canopy Screws	Qty: 2	

#### TOOLS NEEDED (Not Included):

## 1 Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

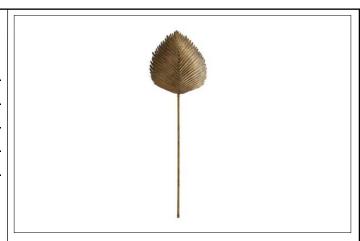

#### TO ASSEMBLE:

- 1. Shut off the main electrical supply from the main fuse box/circuit breaker
- 2. Attach mounting plate to wall or junction box using mounting screws (C).
- 3. Connect ground wire from wall to ground wire from lamp using wire caps (A).
- Attach house wire to lamp wires as shown. Fasten the pairs together with a wire caps
  DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
- 5. Attach front face of light to back plate by inserting canopy screws (B) through predrilled holes in front face and into back plate as shown. Tighten using screwdriver.
- 6. Insert light bulb.
- 7. Restore power to junction box and test fixture. DO NOT EXCEED SPECIFIED MAX WATTAGE.

#### **CARE INSTRUCTIONS:**

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIORS