Cupertino Wall Lantern

CO1472, CO1482, CO1491, CO1501, CO1511

Visual Comfort & Co.

STUDIO COLLECTION

GENERAL PRODUCT INFORMATION:

These fixtures are intended to be installed utilizing NEC compliant junction boxes.

This product is safety listed for wet locations.


Incandescent version may be dimmed with a standard incandescent dimmer.

LED version may be dimmed with a LED dimmer. Consult lamp manufacturer for additional information.


CAUTION - RISK OF FIRE

This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.

SAVE THESE INSTRUCTIONS!

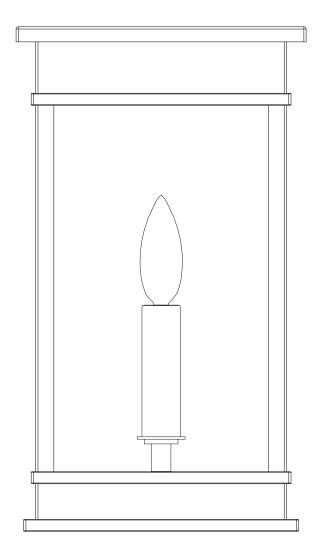

Install the Fixture

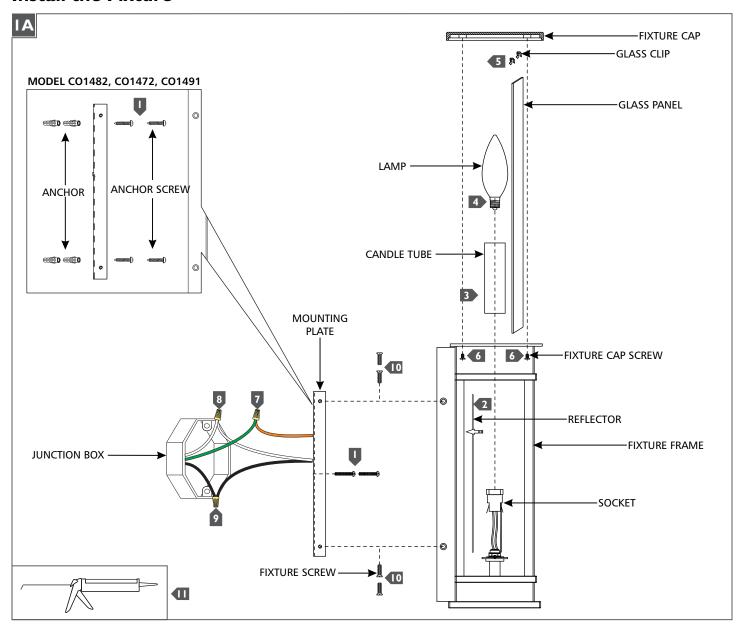

- I Secure the mounting plate to the junction box. NOTE: Model CO1482, CO1472, CO1491 must be secured with anchors and screws.
- 2 Install the reflector plate by affixing it to the back of the fixture frame with the provided hex nuts.
- Install the candle tube on to the socket assembly.
- 4 Screw the lamp into the socket. Refer to the label on the lamp socket for Max Wattage Information.
- Install the glass panels into the fixture frame and secure them in place with the glass clips.
- 6 Install the fixture cap on the top of the fixture frame and secure it in place with the provided screws.
- 7 Connect the fixture to a suitable ground in accordance with local electrical codes.
- 8 Connect the white fixture wire (square and/or rigid) to the neutral power line wire with a wire nut.
- Connect the black fixture wire (round and/or smooth) to the hot power line wire with a wire nut.
- Neatly place all the wires into the junction box, place the fixture base onto the mounting plate, and secure it in place using the fixture screws.
- **Ⅲ** For wet locations, caulk around the base of the fixture with waterproof construction sealant.