DESIGNED BY GREGORY KAY I ASSEMBLED IN AMERICA

REV 03.11.22


PURE LIGHTING



FJ-PST-NF-1-30K-SN Satin Nickel




FJ-PST-NF-1-30K-WH



DESCRIPTION

Compact yet packed with power, the 12VAC FJ Piston LED is a classic flat-back cylindrical fixture that tilts 90° vertically; 360° horizontally. Using the FJ Fast Jack 12 volt Connector, you can choose to mount this fixture head to a Monorail, 2" or 4" Round MonoPoint Canopies, and MultiPoint Canopies. Its 15°, 25°, 35°, or 45° beam spread TRI Lens gives off a smooth, uniformed beam up to 517 Lumens at 9W/3000K/95CRI.

FINISH & MATERIAL



- Machined from Billet Aluminum
- Tilts 90°
- Rotates 360°

MOUNTING OPTIONS

For use with any 12VAC Fast Jack Port including Monorail, 2" or 4" Round MonoPoint Canopies, and MultiPoint Canopies

LENS

Field changeable TRI Lens gives a smooth uniform beam at 15°, 25°, 35° or 45° beam spreads

APPLICATIONS

Suitable for damp or dry location, interior use only

LAMP SPECIFICATIONS

9 watt integrated LED chip, up to 517 Lumens, 3000K

POWER SUPPLY IN CANOPY

120V input-12VAC output, ELV Electric Low Voltage Power Supply (FJ and M fixtures order Power Supply separately)


DIMMING

- Dimmable to 1% Percent of Flicker <25%
- ELV dimming standard. Compatible with Lutron Diva, Skylark, and Legrand ELV dimmers

WARRANTY / LABELS

Prorated 5 year warranty. Assembled in America ETL (Conforms to UL1598 and CSA 22.2 #250.0)




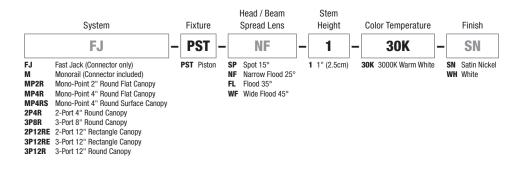


PROJECT	FIXTURE TYPE	DATE	
ITTOULOT	INTOIL	DAIL	



REV 03.11.22








NEW CONSTRUCTION & REMODEL 2" COVER FOR 4" SQUARE JUNCTION BOX

NC2 included with the 2" Round Canopies. NC2 New Construction Junction Box Cover mounts to a standard 4" Electrical Box or Octagon Box, converting it to a 2" Plaster Ring for a 2" Round or Square Canopy. The RM2-Jbox Remodel Plaster Plate cover is used with the existing 4" Square Junction Box and Round Plaster Ring.



- 1 2 3


 Electrical Junction Box RM2 MP2R
- 1. Existing 4SQ J-box with Round Plaster Ring
- 2. Add RM2 Remodel Plate with Power Supply from MP2R fixture
- 3. Plaster and paint ceiling, then add Canopy and fixture

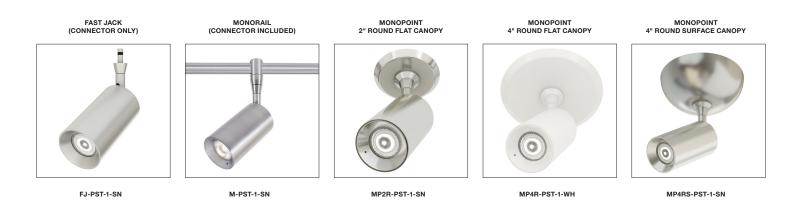



PROJECT	FIXTURE TYPE	DATE	




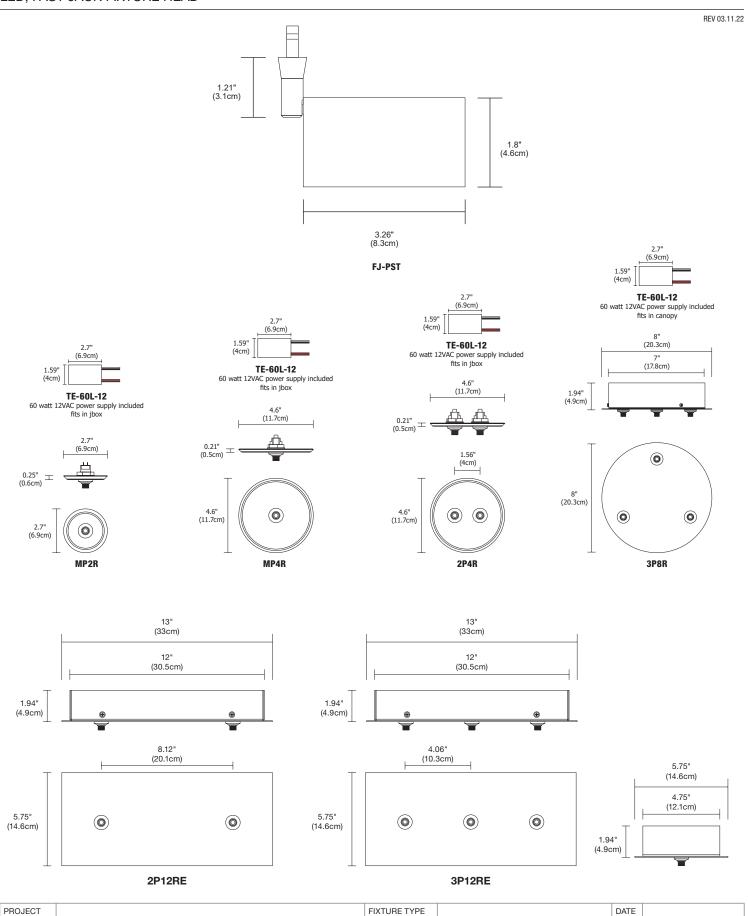




REV 03.11.22

	BEAM ANGLE 16	0	•
			Λ
D'	FC	DIA.	/ \
1'	2000+	3.5"	/ ! \
2'	660	6.75"	/ \
3'	245	10"	/ \
4'	118	13.5"	/ \
5'	75	17"	/ \
6'	50	20"	/ \
7'	35	23"	/ \
8'	17	27"	/ \
1			/ \
			DIA.




	BEAM ANGLE 36	80		R
D,	FC	DIA.		
1'	2000+	7.75"	/	\
2'	278	15.5"	/	\
3'	110	23.5"	/	\
4'	57	31"	/	\
5'	33	39"	/	\
6'	22	46.75"	/	\
7'	16	54.5"	/	\
8'	8	62"	/	\

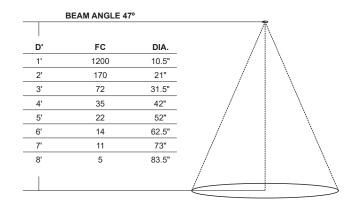

3000K | Rf: 93.2 | Rg: 100.8

COLOR VECTOR GRAPHIC



		GRAPHIC SHIFTS %		
HUE BIN	Rf	CHROMA	HUE	
1	94.1	-2.5%	0.9%	
2	95.4	-2.0%	1.1%	
3	92.2	-0.9%	3.4%	
4	94.5	0.0%	2.8%	
5	94.0	0.1%	2.8%	
6	94.9	2.7%	0.5%	
7	95.4	0.2%	-1.9%	
8	97.5	-0.1%	-1.5%	
9	96.0	-1.7%	0.8%	
10	91.1	-2.1%	4.0%	
11	88.9	0.2%	7.4%	
12	90.5	3.5%	3.0%	
13	94.4	2.9%	-1.3%	
14	91.4	4.5%	-3.9%	
15	92.5	1.1%	-4.1%	
16	89.0	0.7%	-7.9%	

PROJECT	FIXTURE TYPE	ı	DATE	
FROJECT	IIXIONLITE		DAIL	