


Important: Always disconnect the power before installing or replacing bulb and before cleaning or other maintenance.

This light should be installed by a licensed electrician

Assembly & Installation Instructions

1. Shut off power to outlet box (Fig A).
2. Make appropriate electrical connections using wire nuts:
 - a. Connect the fixture's live wire (black) to the live outlet box wire.
 - b. Connect the fixture's neutral wire (white) to the neutral outlet box wire.
 - c. Connect fixture's ground wire (green or uncoated) to the ground outlet box wire. If no ground is present in outlet box, connect fixture's ground wire to the mounting plate using the green screw (included).
 - d. Carefully place connections in outlet box.
3. Place mounting plate over outlet box and secure it with outlet box screws. Using mounting screws and anchors for extra support.
4. Attach the backplate over the mounting plate and tighten with the back plate screws on top.
5. 6017 - Insert E12 bulbs in sockets (not included).
6017F - Insert 18W Twin CFL 2G11 Base bulbs (not included)
6. Place shade onto the fixture shade holders.
7. Restore power to fixture.

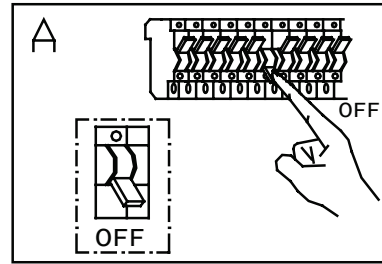

CARE INSTRUCTIONS

- Dusting – Use a clean, dry cloth.
Cleaning – To protect the finish, avoid any harsh abrasives or chemicals.

