


# ASSEMBLY INSTRUCTIONS

## ITEM DESCRIPTION:

ITEM NO.: 49755	NAME: Halette Sconce
MATERIAL TYPE: Onyx	FINISH: White
SOCKET TYPE: E12	SOCKET QTY: 1
BULB WATTAGE: 8W LED ONLY	
VOLTAGE: 110-120V	ITEM NET WEIGHT: 2.78LBS

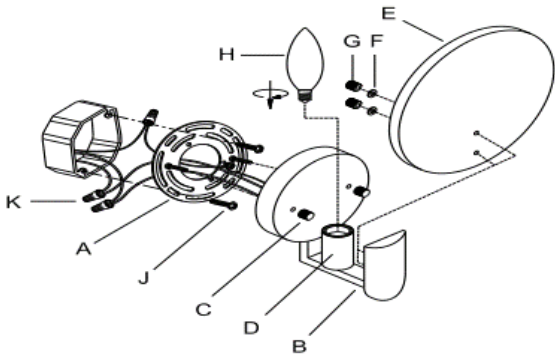

## PARTS INCLUDED:

Mounting Plate ( A )	Qty: 1
Lamp Body ( B )	Qty: 1
Thumb Screw ( C )	Qty: 2
Socket ( D )	Qty: 1
Alabaster Disk ( E )	Qty: 1
Plastic Washers ( F )	Qty: 2
Turn-Knobs ( G )	Qty: 2
LED Bulb (Not included)(H)	Qty: 1

## HARDWARE INCLUDED:

Mounting Screws ( J )
Plastic Wire Connector ( K )

## TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.



## TO ASSEMBLE:

1. Remove all packing contents and parts from the carton(s) carefully.
2. Please be sure you have all parts indicated before you begin assembly.
3. Shut off main electrical supply from the fuse box/circuit breaker.
4. Pull the electrical cord of "J Box" through the exit hole of the mounting plate (A).
5. Carefully inspect the pendant's fixture wires. The neutral fixture wire has very fine ridges molded into its plastic covering. The hot fixture has a smooth covering. The bare wire is the grounded wire.
6. Attach the ground wire from the fixture to the ground junction box wire from the outlet (usually green or bare wire). Fasten each together with a plastic wire connector (K) and wrap the connection with electrical tape. If your outlet box does not have a ground wire, insert the green ground screw into the mounting plate (A) facing down, and wrap the fixture's bare ground wire around the ground screw. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
7. Connect the neutral fixture wire to the neutral junction box wire (usually white). Fasten each together with a wire connector (K) and wrap the connection with electrical tape. Be sure no strands are exposed.
8. Connect the hot fixture wire to the hot junction box wire (usually black). Fasten each together with a plastic wire connector (K) and wrap the connection with electrical tape. Be sure no wire strands are exposed. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
9. Gently tuck the wire connections (K) neatly into the junction box.
10. Attach the mounting plate (A) to the outlet box by using the mounting screws (J) and tighten screws with a screwdriver.
11. Align the two holes on the back plate and attach the lamp body (B) onto the enclosed screws on the mounting plate (A), secure back plate by tightening the thumb screw (C) in a clockwise direction.
12. Insert 1 LED 8W bulb (H) (not included) into the socket (D). DO NOT EXCEED SPECIFIED WATTAGE.
13. Align the two holes on the alabaster disk (E) and attach the alabaster disk (E) onto the thread rod on the lamp body (B) and secure alabaster disk (E) by plastic washers (F) and turn-knobs (G) until tight.
14. Restore power to the junction box and test fixture.

## CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS