

ASSEMBLY INSTRUCTIONS


ITEM DESCRIPTION:

ITEM NO.: 89473	NAME: Hilliard Chandelier
MATERIAL TYPE: Steel/Glass	FINISH: Bronze/Opal
SOCKET TYPE: E12x10/E26x1	SOCKET QTY: 11
BULB WATTAGE: 25W/7W CFL/5W LED	
VOLTAGE: 110-120 V	ITEM NET WEIGHT: 23.15LBS



TO ASSEMBLE:

1. Remove all packing contents from the carton(s) carefully. Please be sure you have all parts indicated before you begin assembly.
2. Shut off the main electrical supply from the main fuse box/circuit breaker.
3. Remove the mounting plate(a) from the canopy(b) by loose 4pcs canopy screws(j)
4. Screw the rod(d4) to the main body(e) and tighten the hexangular screw in the side desire hole by Allen wrench(m) repeat the same operation on the rod (c1), (c2) and (c3).
5. Pass the rod(d1) through metal ring (c) and canopy(b) and tighten it by using set ring(i). pass through the cord as drawing show. Repeat the above operations (7) and (8) on another side.
6. As fig 1, unscrew the screw ring(h) off the socket assembly(f), insert type g 25w bulb (or suitable cfl 7w/led 5w, not included) in the socket. Then attach the glass sphere(g1) to the socket properly, then tighten screw ring(h) to secure the glass sphere till tight. Repeat the above operation the remaining 3pcs small glass sphere(g1), 5pcs med glass sphere(g2). 1pc large glass sphere(g3),
7. Repeat step 8. Pls install type a 40w bulb (or suitable cfl 10w/led 9w, not included) on the labeled xl socket. Do not exceed specified wattage. Pls note install the glass sphere size xl, l, m, s based on the stickers on the label on the socket assembly(f).
8. Carefully inspect the pendant's fixture wires. The neutral fixture wire has very fine ridges molded into its plastic covering. The hot fixture wire has a smooth covering. the bare silver wire is the grounded wire.
9. Attach the ground wire from the fixture to the ground junction box wire from the outlet (usually green) or bare wire). Fasten each together with a plastic wire connector (k) and wrap the connection with electrical tape. If your outlet box does not have a ground wire, insert the green ground screw into the mounting plate (a) facing down, and wrap the fixture's bare ground wire around the ground screw. It is imperative that the outlet box in your home be properly grounded.
10. Connect the neutral fixture wire to the neutral junction box wire (usually white). Fasten each together with a wire connector (k) and wrap the connection with electrical tape. Be sure no strands are exposed.
11. Connect the hot fixture wire to the hot junction box wire (usually black). Fasten each together with a plastic wire connector (k) and wrap the connection with electrical tape. Be sure no wire strands are exposed. Do not reverse the hot and neutral connections or safety will be compromised.
12. Gently truck the wire connections neatly into the ceiling junction box.
13. Attach the mounting plate (a) with nipple to the ceiling outlet box using the enclosed mounting screws (l) and tighten screws with a screwdriver.
14. If attach to cement ceiling, use anchor(n) first then screw strengthened screws(o) into the anchor.
15. If attach to wood ceiling, thread strengthened screw(o) directly into ceiling.
16. Push mounting plate(a) in canopy (b) and thread the canopy screws(j) to secure it till tight.
17. Restore power to the junction box and test fixture.

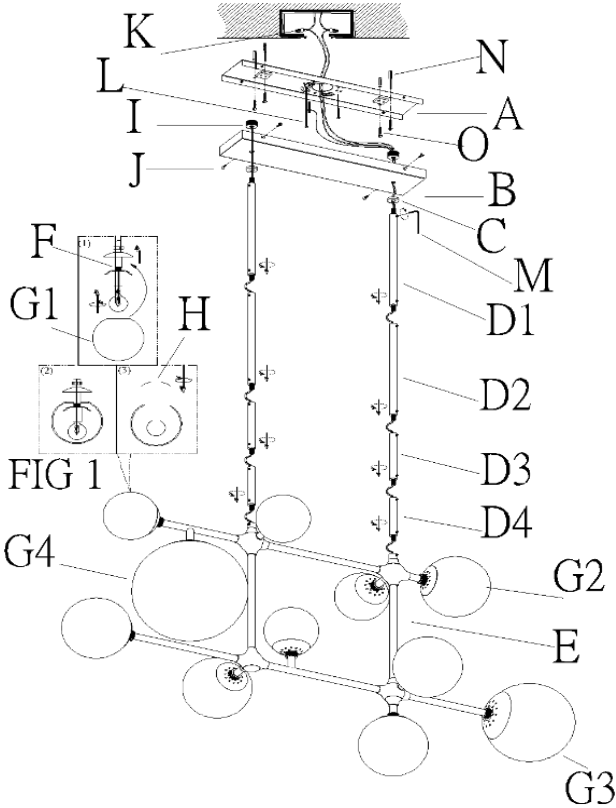

PARTS INCLUDED:

A MOUNTING PLATE	1 PCS	F SOCKET ASSEMBL'	11 PCS
B CANOPY	1 PCS	G GLASS SPHERE	11 PCS
C METAL RING	2 PCS	H SCREW RING	11 PCS
D RODS	8 PCS	I SET RING	2 PCS
E MAIN BODY	1 PCS	J CANOPY SCREW	4 PCS

HARDWARE INCLUDED:

K Plastic Wire Connector	M Allen Wrench
L Mounting Screws	Green Ground Screw
N Anchor	O Strengthened Screw

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation of this chandelier.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIOS