

ASSEMBLY INSTRUCTIONS

ITEM DESCRIPTION:


ITEM NO.: DK89902 NAME: Caviar Adjustable Large Chandelier

MATERIAL TYPE: Glass FINISH: Polished Nickel

SOCKET TYPE: E12 SOCKET QTY: 8

BULB WATTAGE: 40W/10W CFL/9W LED

VOLTAGE: 110-120 V ITEM NET WEIGHT: 16.5LBS

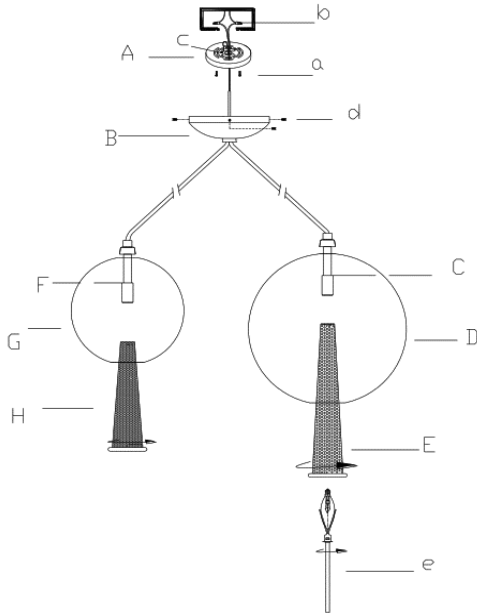

TO ASSEMBLE:

1. SHUT OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER.
2. Carefully unpack all fixture parts and hardware and lay them out on a clear workspace.
3. Gently pull wiring down from ceiling junction box and allow it to hang.
4. Remove the mounting plate (A) from the canopy (B) by loose Canopy screws (d) with screwdriver.
5. Carefully inspect the pendant's fixture wires. The NEUTRAL FIXTURE WIRE has very fine ridges molded into its plastic covering. The HOT FIXTURE WIRE has a smooth covering. The bare silver wire is the GROUND WIRE.
6. Attach the GROUND WIRE from the fixture to the GROUND JUNCTION BOX WIRE from the outlet (usually green or bare wire). Fasten each together with a plastic wire connector (b) and wrap the connection with electrical tape. If your outlet box DOES NOT have a GROUND WIRE, insert the green ground screw (c) into the mounting plate (A) facing DOWN, and wrap the fixture's bare ground wire around the ground screw. IT IS IMPERATIVE THAT THE OUTLET BOX IN YOUR HOME BE PROPERLY GROUNDED.
7. Connect the NEUTRAL FIXTURE WIRE to the NEUTRAL JUNCTION BOX WIRE (usually white). Fasten each together with a wire connector (b) and wrap the connection with electrical tape. Be sure no strands are exposed.
8. Connect the HOT FIXTURE WIRE to the HOT JUNCTION BOX WIRE (usually black). Fasten each together with a plastic wire connector (b) and wrap the connection with electrical tape. Be sure no wire strands are exposed. DO NOT REVERSE THE HOT AND NEUTRAL CONNECTIONS OR SAFETY WILL BE COMPROMISED.
9. Gently tuck the wire connections neatly into the ceiling junction box.
10. Attach the mounting plate (A) with nipple to the ceiling outlet box using the enclosed mounting screws (a) and tighten screws with a screwdriver.
11. Push canopy (B) up over the mounting plate (A) until it is flush with the ceiling and fix the canopy by using 4 pcs Canopy screws (d).
12. Attach Big Sphere Glass (D) to the Longer Socket Assembly (C), push Longer Metal Cone (H) through Big Glass (D), Then screw it onto Longer Socket Assembly (C) till tight. Repeat this operation on another 2 Big Sphere Glass.
13. Attach Medium Sphere Glass (G) on Shorter Socket Assembly (F), push Shorter Metal Cone (H) through Medium Sphere (C), Screw it onto Short Socket Assembly (F) till tight. Repeat this operation on another 4 Medium Sphere Glass.
14. Insert 8 type B 40W bulb (not included) into the socket with Bulb Driver (e). DO NOT EXCEED SPECIFIED WATTAGE.

PARTS INCLUDED:

| | | | |
|----------------------------|--------|-----------------------------|--------|
| (A) Mounting Plate | Qty: 1 | (F) Shorter Socket Assembly | Qty: 4 |
| (B) Canopy | Qty: 1 | (G) Medium Sphere Glass | Qty: 4 |
| (C) Longer Socket Assembly | Qty: 4 | (H) Shorter Metal Cone | Qty: 4 |
| (D) Big Sphere Glass | Qty: 4 | | |
| (E) Longer Metal Cone | Qty: 4 | | |

HARDWARE INCLUDED:

| | | | |
|-----------------------------|------|-------------------|------|
| (a) Mounting Screws | 2 Pc | (d) Canopy Screws | 4 Pc |
| (b) Plastic Wire Connectors | 2 Pc | (e) Bulb Driver | 1 Pc |
| (c) Green Ground Screw | 1 Pc | | |

TO INSTALL YOU WILL NEED:

- 2 people recommended
- Phillips Screwdriver

These instructions are provided for safety. It is very important that they are read carefully and completely before beginning installation of this chandelier.

We strongly suggest that all hard-wired fixtures must be installed by a professional electrician.

CARE INSTRUCTIONS:

Wipe with a soft, dry cloth. To protect finish, avoid the use of chemicals and household cleaners.

For customer service questions call 1-800-338-2150

ARTERIO RS