LED Exterior Wall Sconce

INSTALLATION SHEET

START FROM HERE

- Make sure POWER is COMPLETELY OFF at the fuse box
- Have your fixture installed by a qualified licensed electrician
- Prepare everything in a clear area
- Wear gloves at all times during this installation
- · Read instructions carefully before you start assembly
- Keep this installation sheet for future reference

Technical Support: 1-855-855-8926

- Neep this installation sheet for future reference
- 1. Remove fixture from its original package
- 2. Separate mounting plate (1c) from canopy (2a/3a) by removing canopy screws (2b)
- Make proper electrical connections (black to hot "L", white to neutral "N", ground to "GND") with wire nuts (1b) provided in hardware package
- Attach mounting plate (1c) to electrical junction box (1a) using junction box screws provided (1e) in hardware package
- **5.** Attach canopy (2a/3a) to mounting plate (1c) with canopy screws (2b)
- **6.** Determine angle of covers (3a) and secure with screws (3b)
- To prevent moisture from entering the electrical junction box (1a) and causing a short, seal around the top and side perimeter between the fixture and the wall surface with weather resistant caulking (Illustration 1). The space at the bottom should be left un-caulked to prevent moisture build up

Illustration 1





Illustration 2: Removing Octagon Box Canopy 3b. 2a. 3a.

*For Single Gang Box Installation, the octagon junction box canopy (2a) can be detached from single gang box canopy (3a) by removing the screws (3b).

Please Note:

- This Kuzco LED fixture comes with pre-wired LED module(s)
- Unless instructed, Do Not touch any part of the LED module(s) as any unnecessary contact with the module could cause permanent damage
- For dimming, an ELV (Electronic Low Voltage) or TRIAC type of dimmer is required
- 120-277V input

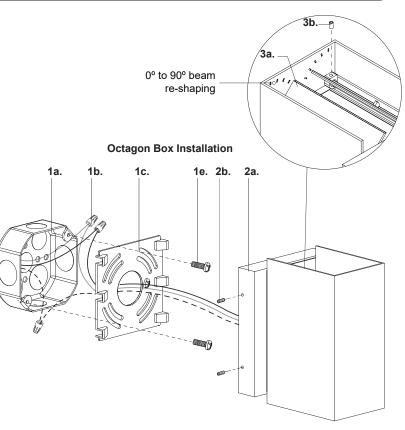

Single Gang Box Installation

