
FLARE - Mini LED Pendant

PD-70913, PD-70925, PD-70937, PD-70945



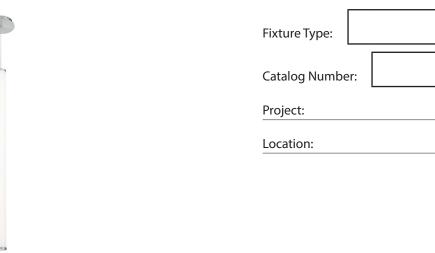

PRODUCT DESCRIPTION

Symmetrical, cylindrical and aerodynamic. Brilliance alone or as a collection.

FEATURES

- Three 12" and one 6" downrods included (additional downrods available)
- Universal driver (120V 277V) concealed within the canopy
- Color Temperature: 3000K
- CRI: 90
- Rated Life: 50,000 hours

SPECIFICATIONS

Construction: Aluminum body with extruded acrylic diffuser


Input: 120 - 277V

Dimming: 100% - 10% ELV / 0-10V / TRIAC

Light Source: High output LED

Finish: Brushed Nickel (BN), Black (BK)

Standards: ETL/cETL, Damp location listed, JA8 2016 Title 24 Compliant

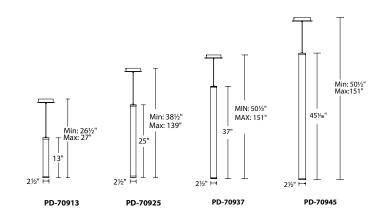

ORDER NUMBER

ONDERNOMDER							
Model	Size	Watt	LED Lumens	Delivered Lumens	Finish		
PD-70913	13"	11W	1099	745			
PD-70925	25"	27W	2426	1700	BN	Brushed Nickel	Section 1
PD-70937	37"	37W	3801	2637	BK	Black	
PD-70945	45"	42W	4254	2853			

Example: PD-70945-BN

dweLED.com Phone (800) 526.2588 Fax (800) 526.2585 Headquarters/Eastern Distribution Center 44 Harbor Park Drive Port Washington, NY 11050 **Central Distribution Center** 1600 Distribution Ct Lithia Springs, GA 30122 Western Distribution Center 1750 Archibald Avenue Ontario, CA 91760