

BONZO Chandelier
3-28-1540


oxygen

FIXTURE TYPE _____ LOCATION _____
 PROJECT _____ DATE _____



-1540 Black/Aged Brass

LIGHT SOURCE	(8x) 3.9W LED Arrays, 3000K, CRI 90
LUMINAIRE POWER	30.6W at 120V
RATED LIFE	30000 hr RL
OPTIONAL COLOR TEMPERATURES	3000K Only
LUMEN OUTPUT	Delivered: 2694 lm (LM-79)
INPUT VOLTAGE	120V AC, 50/60Hz
DRIVER OUTPUT	900mA, 32.4W max power
DIMMING	TRIAC Dimming
CONSTRUCTION	Cold Rolled Steel Housing and Canopy
DIFFUSER	- Satin Opal Glass
FINISHES	Black/Aged Brass (-1540)
MOUNTING	4" Octagonal J-Box
STANDARDS	cETL Damp listed, Conforms to UL STD 1598, Certified CAN/CSA STD C22.2 No 250.0.

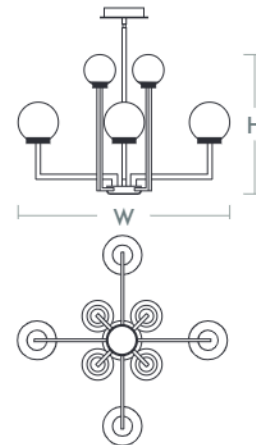

DIMENSIONS

W. Fixture: 31.5"
H. Fixture: 21.75"
Glass Diameter: 4.75" Top Tier
 5.875" Bottom Tier
 Supplied with 2-8", 2-12", and 3-16"
 stems to customize hanging height

Note: Canopy swivel allows up to a 45° slope

Order example for standard fixture:
3-28-1540 (x- Voltage - xxx-Sequence # - xx-Finish)
 3: 120V Only

