

ROMA WALL

FINISH

bronze with alabaster stone
satin brass with alabaster stone

DIMENSIONS (body of fixture)

54 x 85 x 190 mm (w x d x h)

WEIGHT

2kg (4.4lbs)

ILLUMINATION

220-240v - integrated mains LED - 9w - 2700k
110-130v - integrated mains LED - 9w - 2700k
no driver required


DIMMING

trailing dimmable / phase cut (rotary dimmer) - standard
* DALI option available (220-240v only), see next page

WALL ROSE / PLATE




rectangular wall box - 39 x 15 x 77 mm (w x d x h)

CERTIFICATION



mounting plate dimensions

North America junction box cover

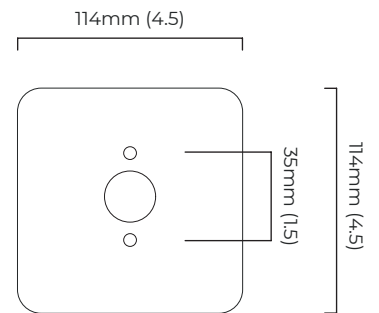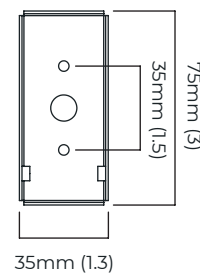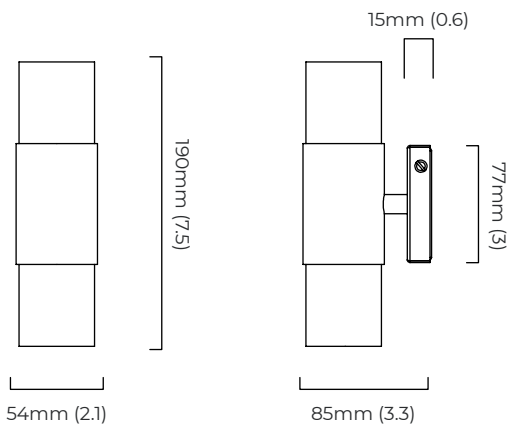

*Diagrams are not to scale.

SKU NUMBER	FINISH DESCRIPTION	VOLTAGE
ROMWAOBZHA-PL-240	bronze with alabaster stone	220 - 240V
ROMWAOBZHA-PL-110	bronze with alabaster stone	110 - 130V
ROMWAOSBHA-PL-240	satin brass with alabaster stone	220 - 240V
ROMWAOSBHA-PL-110	satin brass with alabaster stone	110 - 130V

ROMA WALL - DALI-A

FINISH

bronze with alabaster stone
satin brass with alabaster stone

DIMENSIONS (body of fixture)

54 x 85 x 190 mm (w x d x h)

WEIGHT

2kg (4.4lbs)

ILLUMINATION

220-240v - integrated mains LED - 9w - 2700k
DALI converter to be installed in the wall/ceiling cavity
converter can be placed up to 2m away from the light fixture


DIMMING

DALI compatible

WALL ROSE / PLATE

rectangular wall box - 39 x 15 x 77 mm (w x d x h)

CERTIFICATION

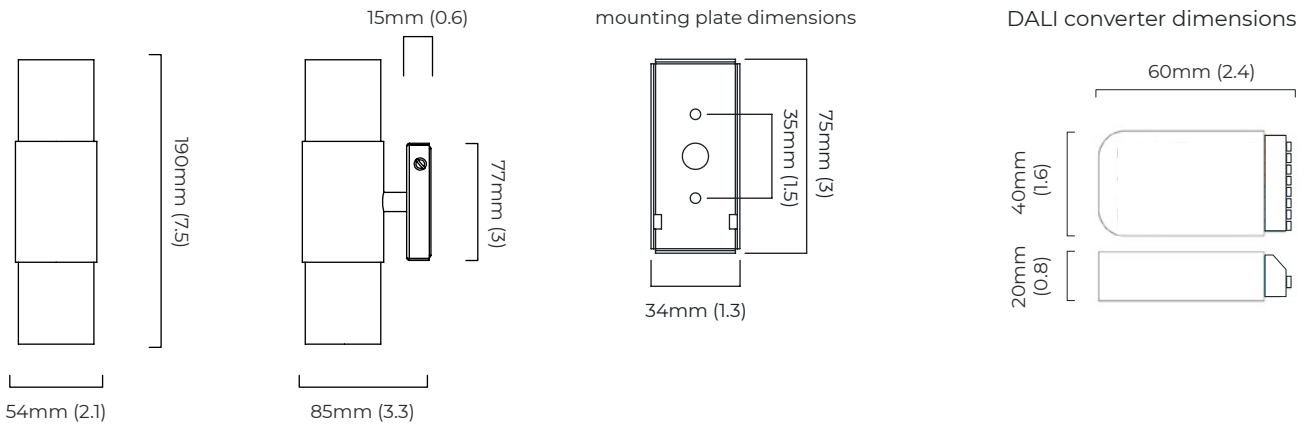

*Diagrams are not to scale.

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
ROMWAOBZHA-DALIA-240	bronze with alabaster stone	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V
ROMWAOBHA-DALIA-240	satin brass with alabaster stone	DALI A included - For lights that do not require aesthetic alterations. Dali can be fitted inside the ceiling/wall cavity	220 - 240V

ROMA WALL - DALI-B

FINISH

bronze with alabaster stone
satin brass with alabaster stone

DIMENSIONS (body of fixture)

54 x 95 x 190 mm (w x d x h)

WEIGHT

2kg (4.4lbs)

ILLUMINATION

220-240v - integrated mains LED - 9w - 2700k
DALI converter to be installed in the wall rose


DIMMING

DALI compatible


WALL ROSE / PLATE

round wall rose - 116 x 25 mm (dia x h)

CERTIFICATION

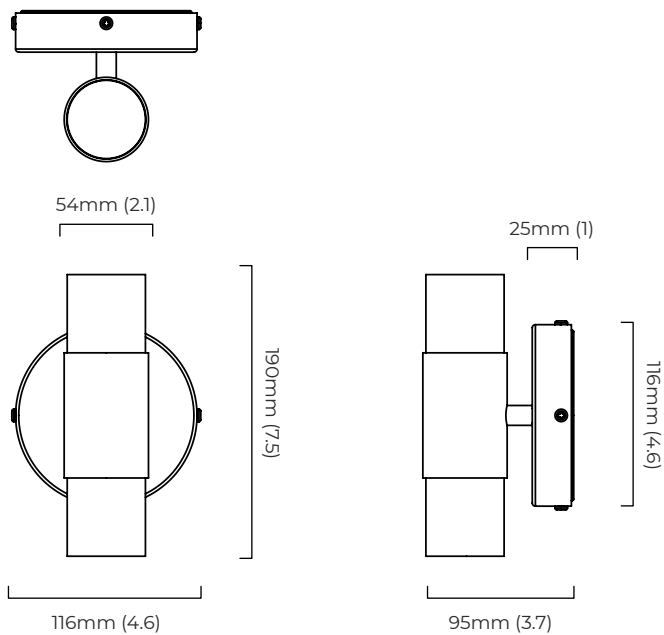

mounting plate dimensions

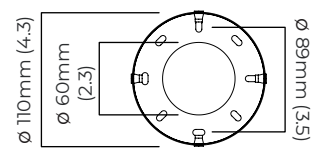

*Diagrams are not to scale.

SKU NUMBER	FINISH DESCRIPTION	TYPE OF DALI	VOLTAGE
ROMWAOBZHA-DALIB-240	bronze with alabaster stone	DALI B included - The light will feature a deeper ceiling/wall rose. For use when there is no space in the existing ceiling/wall cavity	220 - 240V
ROMWAOBZHA-DALIB-240	satin brass with alabaster stone	DALI B included - The light will feature a deeper ceiling/wall rose. For use when there is no space in the existing ceiling/wall cavity	220 - 240V